




Solvent Vapor Detector

E2610-VOC

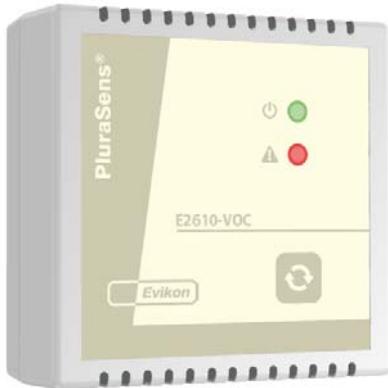

Features

- Toluene, Xylene, Ethanol
- Sensitive and stable detection
- Compact housing providing optimal airflow
- Visual and acoustic alarms
- Two output relays for alarm / ventilation control

Specifications

Target gases	Toluene, Xylene, Ethanol, Volatile Organic Compounds
Default calibration	Toluene
Sensing method	long-life electrochemical cell
Sensor lifetime	> 10 years
Sampling method	diffusion
Detection range	0...100% LEL of target gas
Resolution	0,1 %LEL of target gas
Accuracy	± 2 %LEL of target gas
Signal update	every 1 second
Response time	~30 seconds
Warm-up time	≤ 1 min
Self-diagnostics	full functionality check at start-up
Maintenance interval	12 months
Power supply	24 V DC/AC or 90...265 VAC
Power consumption	< 2 W
Digital interface	UART
Alarms	red blinking LED, buzzer
Output relays	2 relays with switch-over contact, 250 VAC / 30 VDC, 5 A max
Default alarm set-points	I 10% LEL of target gas II 25% LEL of target gas
Enclosure	ABS plastic with ventilation slots, protection class IP20
Dimensions	H 85 x W 85 x D 36 mm
Operating environment	residential, business and industrial indoor spaces
Operating conditions	-30...+70 °C, <95 %RH, without condensation

