

CP1H

The All-in-One Controller



» Analogue I/O built-in

» 4 axes pulse I/O

» Flexible communications

Advanced Industrial Automation

OMRON


The All-in-One Controller

Combining the processing power and data capacity of the CJ1M series and the built-in digital I/O functionality of the CPM2A series in a compact PLC outline, the CP1H CPU series sets new standards.

With 4 high-speed encoder inputs up to 1 MHz (single phase) and 4 pulse outputs up to 1 MHz (line driver), CP1H CPUs are ideal for positioning and speed control. Their optional 4 analogue inputs and 2 analogue outputs plus advanced PID control with auto-tuning also make them ideal for continuous control applications.



Omron's PLC Lineup

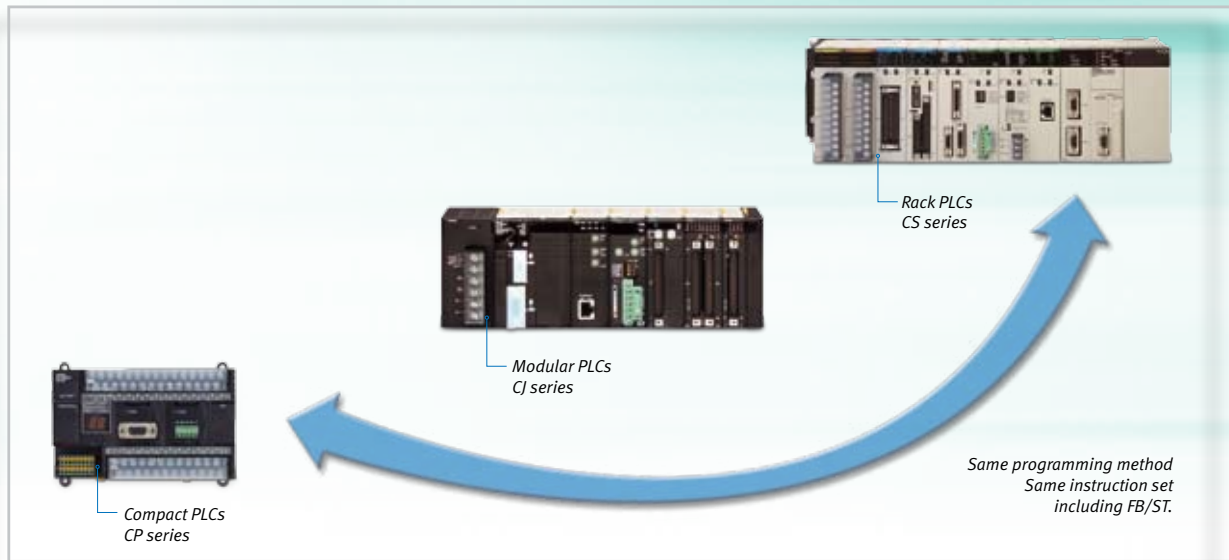

Small-scale control

Large-scale control

What's more, expandable with CPM1A I/O units (up to 320 I/O points) and up to two CJ1 Special I/O units or CPU bus units, CP1H CPUs offer a wide range of communication interfaces and advanced I/O units.

Equipped with a USB interface as standard for programming and monitoring, the new CPUs allow up to two serial ports to be plugged in for communication with HMI or field devices. And, of course, they provide 'Smart Platform' communication routing over multiple network layers.

Using CX-One, programs can be created that enable the user to build, configure and program networks, PLCs, HMIs, motion-control systems, drives, temperature controllers and sensors.

The CP1H CPU series has the same architecture as the CS/CJ PLC series, which means programs are compatible for memory allocations and instructions and also support Function Blocks and Structured Text.


Features at a glance

- 4 high-speed encoder inputs and 4 fast pulse outputs
- AC or DC supply, 24 digital inputs and 16 digital outputs (transistor or relay)
- CJ1M-compatible instruction set and execution speed
- Expandable with intelligent CJ1 I/O and communication units
- Analogue I/O built-in (optional), RS232C and RS-422A/485 serial ports (plug-in option boards)

High-speed counter/encoder input


Four-axes Counter Function (Single-phase or Differential Phases)

CP1H-X(A) CPU Units: Four axes, single-phase at 100 kHz or differential phases at 50 kHz
 CP1H-Y CPU Units: Two axes, single-phase at 1 MHz or differential phases at 500 kHz plus two axes, single-phase at 100 kHz or differential phases at 50 kHz

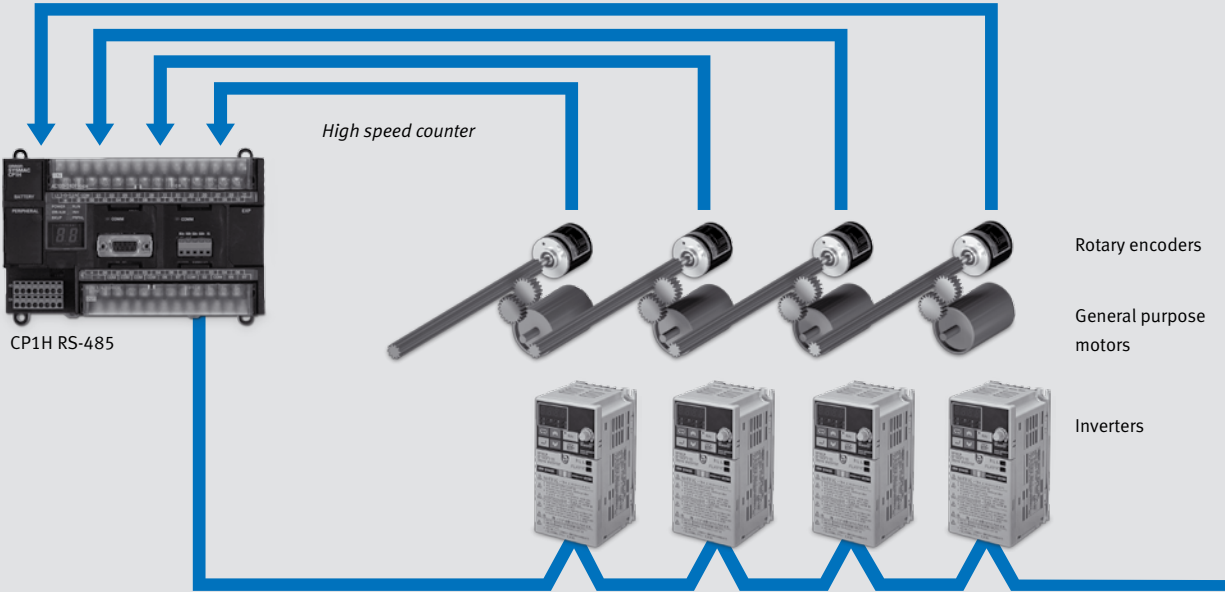


Eight Interrupt Inputs

- Eight inputs can be used as:
- 50 μ s pulse catch inputs
 - interrupt inputs
 - simple counter inputs (< 5 kHz)

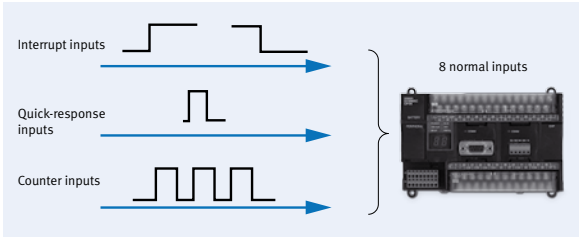


Program execution speed

Fast I/O requires fast response, the CJ1M core provides class-leading program execution speed.

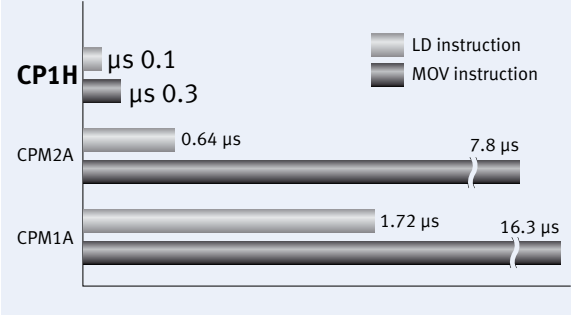

4 Pulse outputs for precise positioning

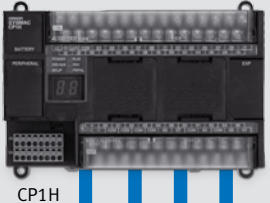


CP1H



Pulse Output Function for Up to Four Axes.



CP1H-X(A) CPU Units: Two axes at 100 kHz and two axes at 30 kHz

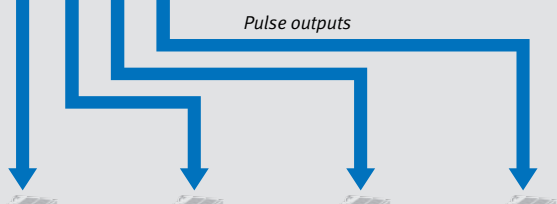

CP1H-Y CPU Units: Two axes at 1 MHz and two axes at 30 kHz



Pulse outputs







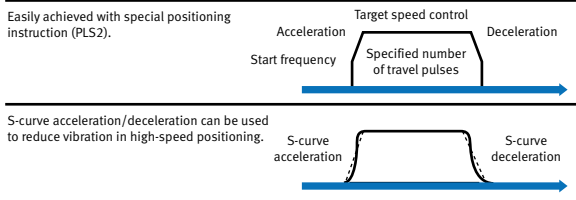



Example: Four-axes Control in Electronic Component Manufacturing Equipment




Easy engineering with standard functions


- Single-instruction Origin Search Function
- Positioning with Trapezoidal Acceleration and Deceleration (PLS2 Instruction)



Interrupt Feeding (ACC and PLS2 Instructions)

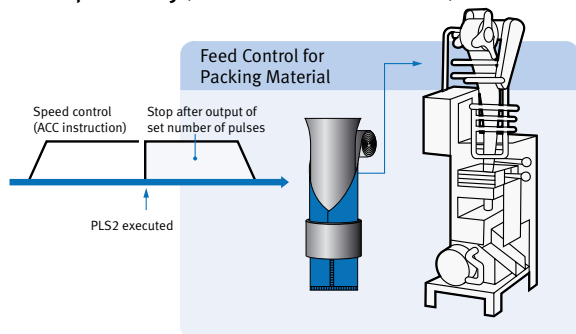

1MHz High-speed Pulse Output (CP1H-Y CPU Units: To be released soon.)

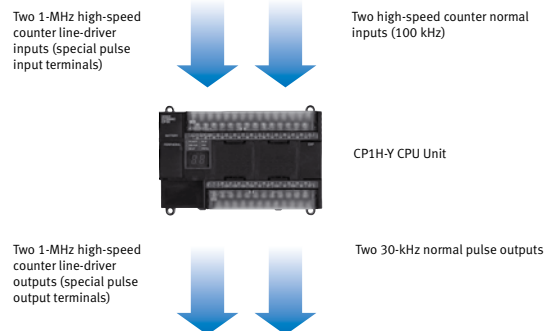

CP1H-Y CPU Units offer built-in 1-MHz line-driver I/O.


- Line-driver outputs: Two each for CW and CCW.
 - Line-driver inputs: Two each for phases A, B, and Z.
- CP1H-Y CPU Units also have 20 normal I/O points (12 inputs and 8 outputs), and can provide 100-kHz high-speed counter inputs for two axes and 30-kHz pulse outputs for two axes.

Analogue I/O

Analogue Control without Using Expansion Units


CP1H-XA CPU Units have four analogue inputs and two analogue outputs built in.

Previously

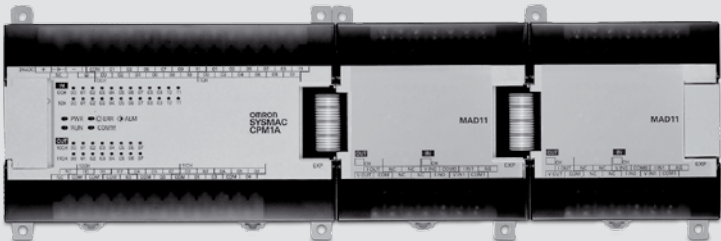


CPM2A CPU Unit with Two CPM1A-MAD11 Analogue I/O Units
(2 Analogue Inputs and 1 Analogue Output)

CP1H

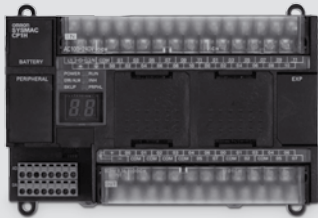


CP1H-XA

Oil Pressure Control

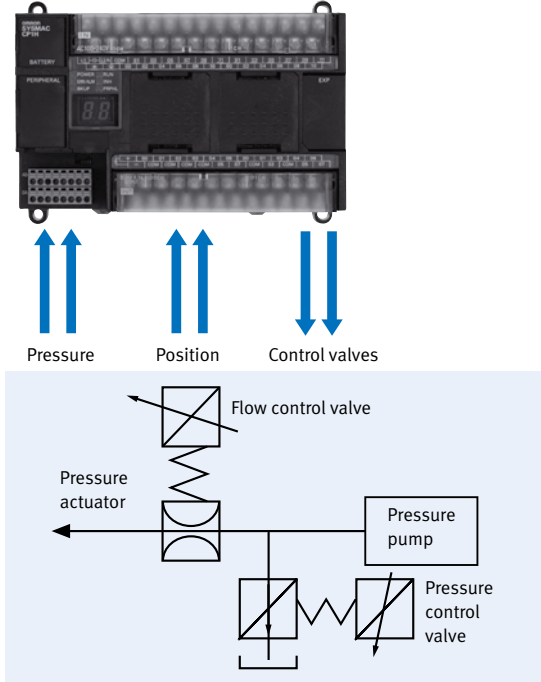


Inspection Devices

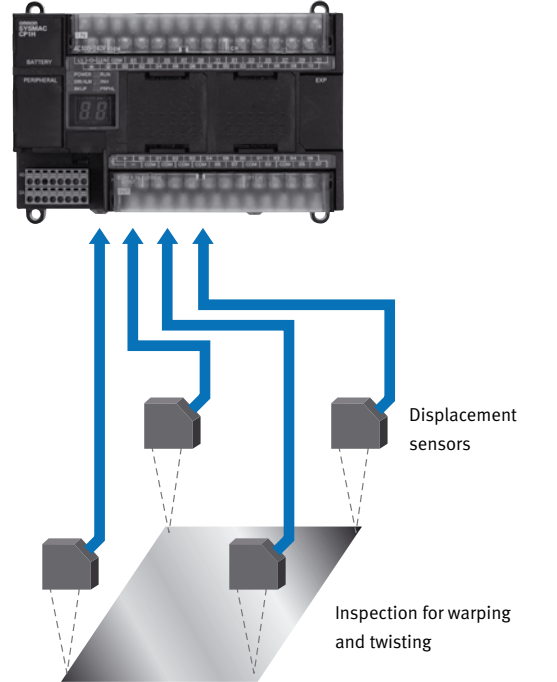

Serial communications


Two Option Boards can be mounted for RS-232C or RS-422A/485 communications making it easy to simultaneously connect to a PT, and other devices such as Inverters, Temperature controllers, Smart Sensors or Serial PLC link. The standard USB port is used for connection to a personal computer.

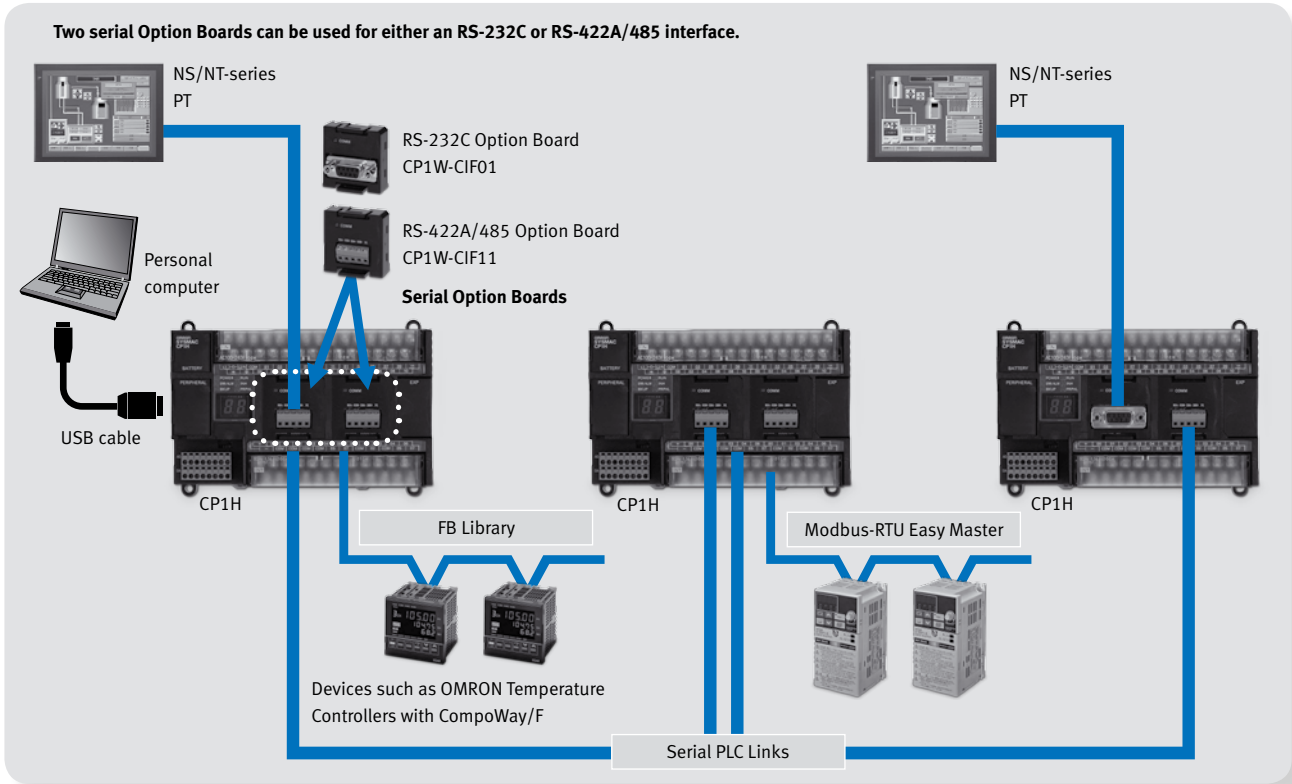

Modbus-RTU Easy Master


The Modbus-RTU Easy Master makes it easy to control Modbus slaves (such as Inverters). Serial communications can be executed independently of the program simply by setting a Modbus command in a fixed memory area and turning ON software switches.

• Command	Port 1: D32200	~	D32249	
	Port 2: D32300	~	D32349	
	Slave address (00 to F7 hex)	Function code	Number of bytes	Data (94 bytes max.)
• Response	Port 1: D32250	~	D32299	
	Port 2: D32350	~	D32399	
	Slave address	Function code	Error code	Number of bytes
				Data (93 bytes max.)

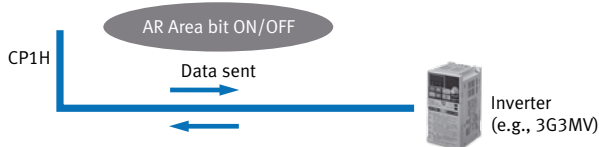

Serial PLC Links

Up to 10 Words/Unit of data can be exchanged between up to nine CP1H (or CJ1M) CPU units.

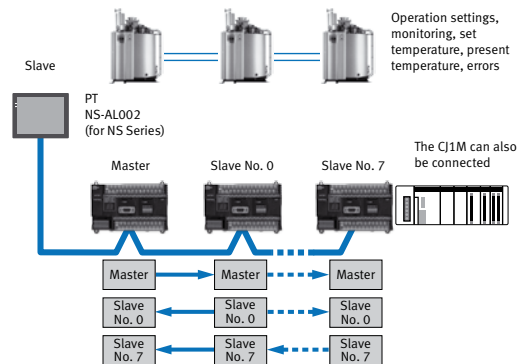

NS/NT-series PTs can also be incorporated as slaves (1:N NT Link connections) to exchange data using the NT Links with only the master CP1H. Each is treated as one slave node.

Reduce development time with efficient tools


- **Plug-and-play USB Connection**

Just install the CX-Programmer (Ver. 6.1 or higher) and connect the USB cable to the CP1H. The driver will be installed automatically.



- **A Built-in USB Port (USB 1.1, Type B) Enables a Personal Computer to Be Connected using a standard USB cable.**

Standard A-type male to B-type male USB cables can be used.



Note: Programming Consoles (e.g., CQM1H-PRO01 and C200H-PRO27) cannot be used with the CP1H.


A Wealth of Instructions

- **PID Instruction with Autotuning**

PID constants can be automatically tuned for the PID instruction. The limit cycle method is used for tuning, allowing tuning to be completed quickly.


- **Floating-point Decimal Instructions, Trigonometric Instructions, and More.**

Just like the CS/CJ-series PLCs, the CP1H has approximately 400 instructions for ladder programming.

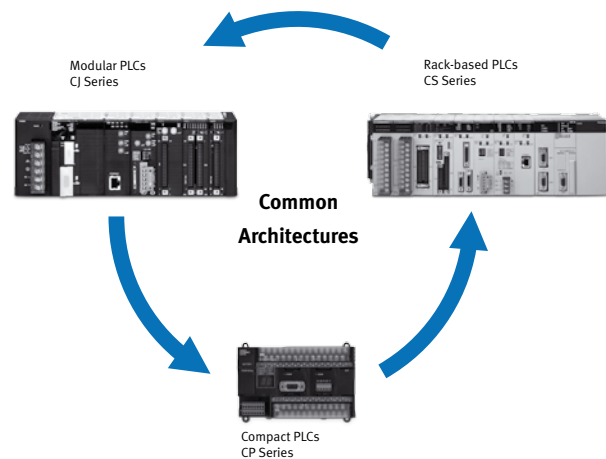

The Structured Text (ST) Language Makes Arithmetic Operations Even Easier

In addition to ladder programming, function block logic can be written in ST language, which conforms to IEC 61131-3. Arithmetic processing is also possible with ST, including processing of absolute values, square roots, logarithms, and trigonometric functions (SIN, COS, and TAN). Processing that is difficult to write in ladder programming becomes easy using structured text.

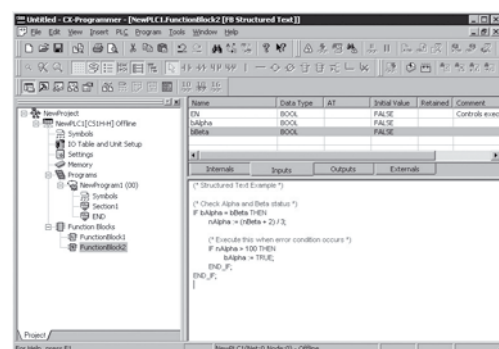


Communications Programs Are Provided by the Function Block Library

OMRON's Function Block Libraries drastically reduce the amount of programming needed to communicate with field devices. Just drag and drop a pre-tested function block in your program and set the parameters. You'll be up and running within one minute.


- **A FB Library for Pulse Outputs.**

Function blocks are also provided for pulse outputs to make it easy to write programs for positioning in addition to communications function blocks. These function blocks will reduce the time required for developing programs for applications such as for OMRON's Smartstep Servo System.

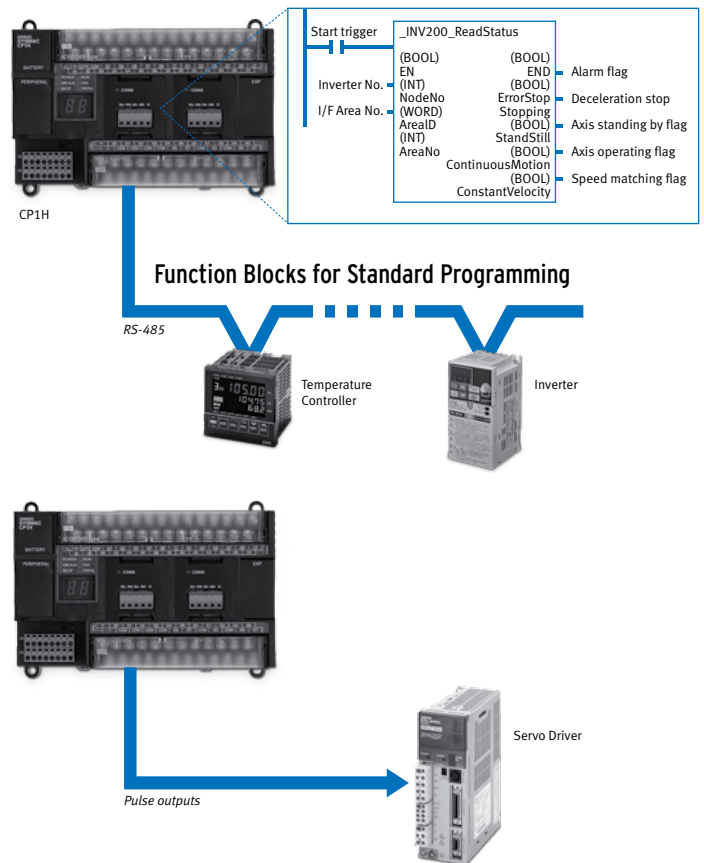

Security

Eight-character Password Protection

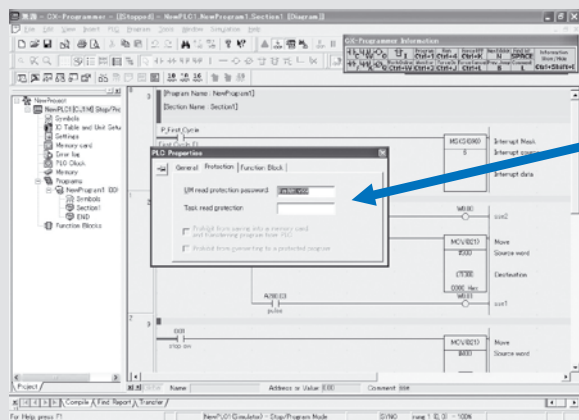

Programs can be protected by setting a password from the CX-Programmer (with the PLC online).

Password setting: Up to 8 alphanumeric characters (A-Z, a-z, 0-9)


One software, one connection, one minute



CX-One is a single programming and configuration environment that enables the user to build, configure and program networks, PLCs, HMIs, Motion Control systems, Drives, Temperature Controllers and Sensors. The result of a single software is to reduce complexity of the configuration, allowing automation systems to be programmed or configured with minimal training.


• CX-Integrator

Settings and configurations for devices can be made from any PLC in the network.



• CX-Designer


The CX-Designer can be started from the CX-Integrator. Settings such as the PLC and Unit information are passed to the CX-Designer, so you can start developing screens immediately after CX-Designer starts.

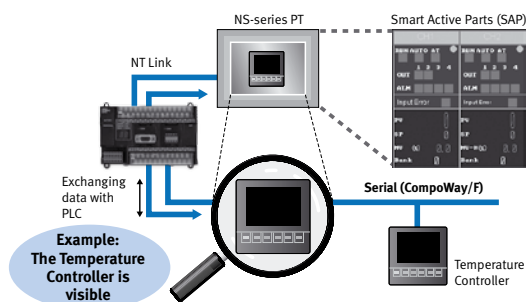

1 Network Software	CX-Integrator (Ver. 1.10) CX-Protocol (Ver. 1.70) CX-FLnet (Ver. 1.00)
2 PLC Software	CX-Programmer (Ver. 6.10) CX-Simulator (Ver. 1.60) SwitchBox (Ver. 1.70)
3 HMI Software	CX-Designer (Ver. 1.00)
4 Motion Controller Software	CX-Motion (Ver. 2.20) CX-Motion-NCF (Ver. 1.30) CX-Motion-MCH (Ver. 1.00) CX-Position (Ver. 2.10) CX-Drive (Ver. 1.10)
5 PLC-based Process Control Software	CX-Process Tool (Ver. 5.00) NS-series Face Plate Auto-Builder (Ver. 2.01)
6 Component Software	CX-Thermo (Ver. 2.01)

• CX-Simulator


Online CPU Unit operations, such as program monitoring, I/O memory manipulation, PV monitoring, forced setting/resetting memory bits, differential monitoring, data tracing, and online editing, can be executed without the actual PLC.

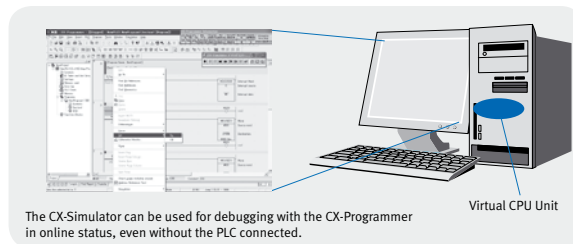


• CX-Thermo

The Support Software for Temperature Controllers (CX-Thermo) can be started from the CX-Integrator's Serial Communications (CompoWay/F) network.

Parameters can be created, edited, and transferred at the computer. The time required to make settings can be reduced when setting the same parameters in multiple devices.

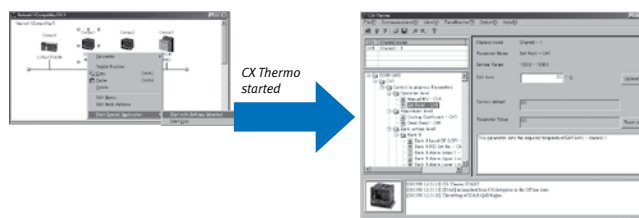

Handy built-in functions make maintenance easier

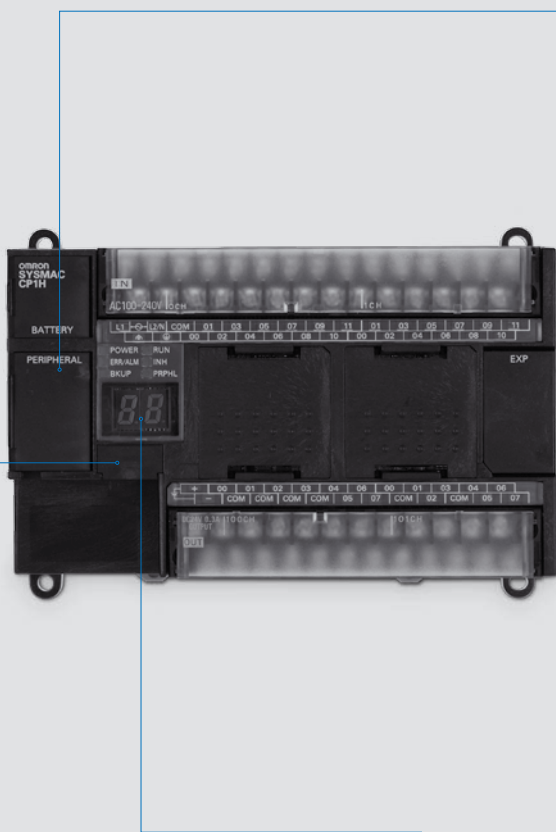


1 Analogue Inputs Are Made Simple

An analogue control setting and an analogue input are provided.

Analogue setting

The analogue control setting has a resolution of 256 steps. When the value is changed it is displayed (hexadecimal) for three seconds on the 7-segment display.




Analogue Input

This input has a resolution of 256 steps and is used for an analogue input set of 0 to 10 V. Each CP1H CPU Unit has one of these connectors built in. (The built-in analogue I/O for CP1H-XA CPU Units is separate.) A device, such as a potentiometer, can be connected to enable direct manual operation and control from a control panel. The maximum cable length is 3 metres. A connecting cable (1 m) is included with the CPU Unit.


2 Memory Cassette

- Data, such as programs and initial memory values, can be stored on a Memory Cassette (optional) and copied to other systems.
- The Memory Cassette can also be used when installing new versions of application programs.

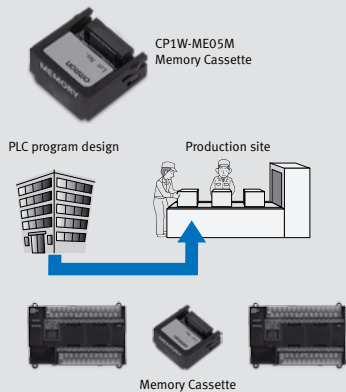

3 7-segment Status Display

- The 7-segment Display provides two display digits.
- In addition to displaying error codes for errors detected by the PLC, codes can be displayed on the display from the ladder program.
- The 7-segment display is useful for maintenance as well, allowing problems that arise during system operation to be grasped without using any Support Software.

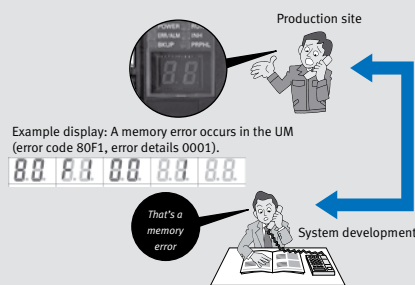

4 Battery-free Operation

- The values in the DM Area (32 Kwords) are saved in the CPU Unit's built-in flash memory as initial values, and can be read at startup.
- Battery-free operation is also possible when saving production data and machine parameters in the DM Area, turning OFF the power, and using the same data again for the next production run.


Note:

- A battery is required for the clock function and to retain the status of HR.
- Area bits and counter values. A battery is provided as a standard feature with the CPU Unit.
- The user program (ladder program) is stored in built-in flash memory, so no battery is required to back it up.

Expansion I/O units

Expand as needed

CJ-series Special I/O Units and CPU Bus Units Can Be Connected

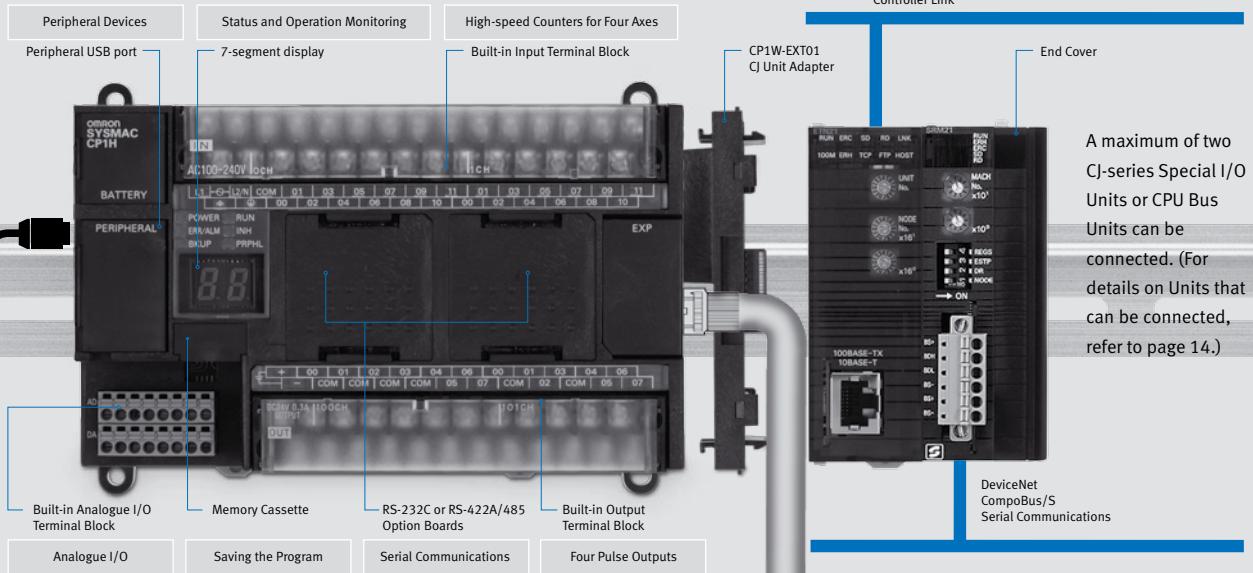

- Analogue I/O (CP1H-XA CPU Units Only)

Standard USB cable




- **CP1W-ME05M** Memory Cassette




- The following optional serial interfaces can be used for two ports




Only one I/O Connecting Cable can be used.

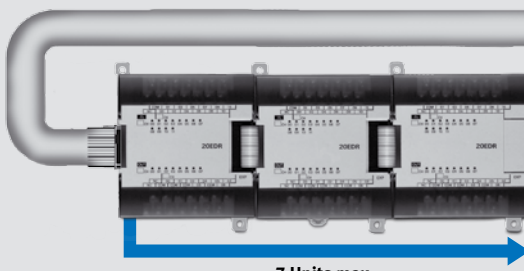

Up to 320 I/O points can be obtained by connecting seven Expansion I/O Units.





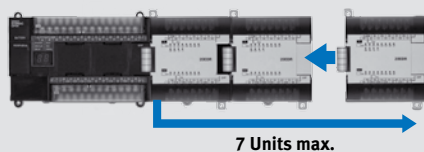


A maximum of seven CPM1A Expansion I/O Units can be connected. For details on Unit restrictions, refer to page 15.

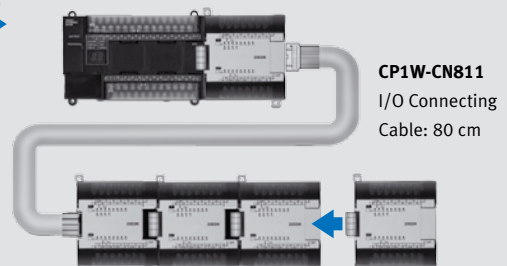

Expansion I/O Units can also be wired below by using CP1W-CN811 I/O Connecting Cable.

CPU unit overview

CP1H-XA40D□-□ Built-in Analogue I/O	CP1H-X40D□-□ Basic Model	CP1H-Y20D□-□ High-speed Positioning <i>(To be released soon)</i>
 <p>CP1H-XA40DR-A AC power supply, 24 DC inputs, 16 relay outputs, 4 analogue inputs, 2 analogue outputs</p>  <p>CP1H-XA40DT-D DC power supply, 24 DC inputs, 16 transistor (sinking) outputs, 4 analogue inputs, 2 analogue outputs</p> <p>CP1H-XA40DT1-D DC power supply, 24 DC inputs, 16 transistor (sourcing) outputs, 4 analogue inputs, 2 analogue outputs</p>	 <p>CP1H-X40DR-A AC power supply, 24 DC inputs, 16 relay outputs</p>  <p>CP1H-X40DT-D DC power supply, 24 DC inputs, 16 transistor (sinking) outputs</p> <p>CP1H-X40DT1-D DC power supply, 24 DC inputs, 16 transistor (sourcing) outputs</p>	 <p>CP1H-Y20DT-D DC power supply, 12 DC inputs, 8 transistor (sinking) outputs</p> <p>Two 1-MHz line-driver inputs (phases A, B, and Z) and two 1-MHz line-driver outputs (CW and CCW) are provided separately.</p>

	CP1H-XA CPU Units	CP1H-X CPU Units	CP1H-Y CPU Unit
I/O capacity	24 inputs, 16 outputs		12 inputs, 8 outputs Line-driver inputs: Phases A, B, and Z for 2 axes Line-driver outputs: CW and CCW for 2 axes
High-speed counter	100 kHz (single-phase), 50 kHz (differential phases), 4 axes		1 MHz (single-phase), 500 kHz (differential phases) for 2 axes (line-driver input), 100 kHz (single-phase), 50 kHz (differential phases) for 2 axes (4 axes total)
Pulse output function (Models with Transistor Outputs only)	100 kHz for 2 axes and 30 kHz for 2 axes (4 axes total)		1 MHz for 2 axes (line-driver output), 30 kHz for 2 axes (4 axes total)
Serial communications	USB port (peripheral port) and 2 optional serial ports (either RS-232C or RS-422A/485 Option Boards)		
Analogue I/O	4 analogue inputs and 2 analogue outputs	-	-
Interrupt inputs Quick-response inputs (50-ms width min.)	8 inputs		6 inputs
User program capacity	20 kstep		
DM capacity	32 keywords		
Maximum number of CPM1A Expansion I/O Units	7 (Refer to page16 for Unit restrictions.)		
Maximum number of CJ-series Units	2 (CJ-series Special I/O Units and CPU Bus Units only. Refer to page 14 for information on Units that can be used.)		

• Options

 <p>CP1W-ME05M Memory Cassette</p>	 <p>CP1W-CIF01 RS-232C Option Board</p>	 <p>CP1W-CIF11 RS-422A/485 Option Board</p>
--	---	---

CP-series expansion units

• Expansion I/O Units

CPM1A-8ED

Input points: 8 DC input

CPM1A-8ER

Output points:
8 Relay output

CPM1A-8ET

Output points: 8 Transistor output (sinking)

CPM1A-8ET1

Output points: 8 Transistor output (sourcing)



CPM1A-20EDR1

Input points: 12 DC inputs

Output points: 8 relay outputs

CPM1A-20EDT

Input points: 12 DC inputs

Output points: 8, transistor outputs (sinking)

CPM1A-20EDT1

Input points: 12 DC inputs

Output points: 8, transistor outputs (sourcing)



CPM1A-40EDR

Input points: 24 DC inputs

Output points: 16 relay outputs

CPM1A-40EDT

Input points: 24 DC inputs

Output points: 16 transistor outputs (sinking)

CPM1A-40EDT1

Input points: 24 DC inputs

Output points: 16 transistor outputs (sourcing)



• Analogue Units



Analogue Input Unit

CPM1A-AD041

Analogue inputs: 4
(resolution: 6,000)



Analogue Output Unit

CPM1A-DA041

Analogue outputs: 4
(resolution: 6,000)



Analogue I/O Unit

CPM1A-MAD11

Analogue inputs: 2 (resolution: 6,000)
Analogue outputs: 1 (resolution: 6,000)



Analogue I/O Unit

CPM1A-MAD01

Analogue inputs: 2 (resolution: 256)
Analogue outputs: 1 (resolution: 256)

• Temperature Sensor Units

CPM1A-TS001

Thermocouple inputs: 2

CPM1A-TS002

Thermocouple inputs: 4

CPM1A-TS101

Platinum resistance
thermometer inputs: 2

CPM1A-TS102

Platinum resistance
thermometer inputs: 4


CPM1A-TS101-DA

Platinum resistance
thermometer inputs: 2

Analogue output: 1
(resolution: 256)



• I/O Connecting Cable



CP1W-CN811

80 cm

• CompoBus/S - I/O Link Unit

CPM1A-SRT21

Input points: 8

Output points: 8



• DeviceNet I/O Link Unit

CPM1A-DRT21

Input points: 32

Output points: 32



• PROFIBUS-DP I/O Link Unit

CPM1A-PRT21

Input points: 16

Output points: 16



• CJ-series Special I/O Units and CPU Bus Units

Two CJ-series Special I/O Units or CPU Bus Units can be connected by using a CJ Unit Adapter.

CJ Unit Adapter

CP1W-EXT01



CJ-series Special I/O Units

Analogue Input Unit

CJ1W-AD□□□-V1

Analogue Output Unit

CJ1W-DA□□□

Analogue I/O Unit

CJ1W-MAD42

Process Input Unit

CJ1W-PTS□□

CJ1W-PDC15

Temperature Control Unit

CJ1W-TC□□□

CompoBus/S Master Unit

CJ1W-SRM21

PROFIBUS-DP Slave Unit

CJ1W-PRT21



CJ-series CPU Bus Units

Ethernet Unit

CJ1W-ETN21

Controller Link Unit

CJ1W-CLK21-V1

Serial Communications Unit

CJ1W-SCU□□-V1

DeviceNet Unit

CJ1W-DRM21

PROFIBUS-DP Master Unit

CJ1W-PRM21


CAN unit

CJ1W-CORT21



Maximum configuration

A maximum of seven CPM1A Expansion I/O Units can be connected.

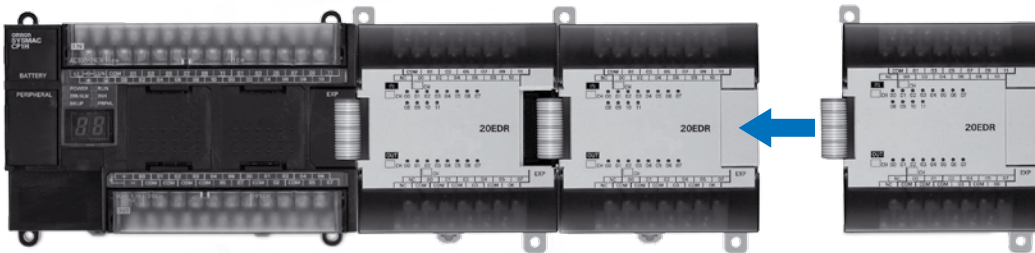

• Group A

Unit type		Model	
Expansion I/O Units	40 I/O points	CPM1A-40EDR	
		CPM1A-40EDT	
		CPM1A-40EDT1	
		CPM1A-20EDR1	
		CPM1A-20EDT	
	20 I/O points	CPM1A-20EDT1	
		8 inputs	CPM1A-8ED
		8 outputs	CPM1A-8ER
			CPM1A-8ET
			CPM1A-8ET1
Analogue Unit	2 analogue inputs, 1 analogue output	CPM1A-MAD01 CPM1A-MAD11	
Temperature Sensor Units	2 thermocouple inputs	CPM1A-TS001	
	2 platinum resistance thermometer inputs	CPM1A-TS101	
	2 platinum resistance thermometer inputs, 1 analogue output	CPM1A-TS101-DA	
CompoBus/S I/O Link Unit	8 inputs, 8 outputs	CPM1A-SRT21	
DeviceNet I/O Link Unit	32 inputs, 32 outputs	CPM1A-DRT21	
PROFIBUS-DP I/O Link Unit	16 inputs, 16 outputs	CPM1A-PRT21	

• Group B Units that each count as two units

Unit type		Model
Analogue Units	4 analogue inputs	CPM1A-AD041
	4 analogue outputs	CPM1A-DA041
Temperature Sensor Units	4 thermocouple inputs	CPM1A-TS002
	4 platinum resistance thermometer inputs	CPM1A-TS102

• CJ-series Special I/O Units and CPU Bus Units

A maximum of two CJ-series Special I/O Units or CPU Bus Units can be connected by using a CP1W-EXT01 CJ Unit Adapter.

CJ-series Special I/O Units				CJ-series CPU Bus Units	
Unit name	Model	Unit name	Model	Unit name	Model
Analogue Input Units	CJ1W-AD081-V1	Process Input Units	CJ1W-PDC15	Serial Communications Units	CJ1W-SCU41-V1
	CJ1W-AD041-V1	Temperature Control Units	CJ1W-TC001		CJ1W-SCU21-V1
Analogue Output Units	CJ1W-DA08V		CJ1W-TC002	Ethernet Unit	CJ1W-ETN21
	CJ1W-DA08C		CJ1W-TC003	DeviceNet Unit	CJ1W-DRM21
	CJ1W-DA041		CJ1W-TC004	Controller Link Unit	CJ1W-CLK21-V1
	CJ1W-DA021		CJ1W-TC101	PROFIBUS-DP Master Unit	CJ1W-PRM21
Analogue I/O Unit	CJ1W-MAD42		CJ1W-TC102	CAN Unit	CJ1W-CORT21
Process Input Units	CJ1W-PTS51		CJ1W-TC103		
	CJ1W-PTS52		CJ1W-TC104		
	CJ1W-PTS15	CompoBus/S Master Unit	CJ1W-SRM21		
	CJ1W-PTS16	PROFIBUS-DP Slave Unit	CJ1W-PRT21		

Specifications

• CPU Unit Specifications

Item	AC power supply models: CP1H-□□□-A	DC power supply models: CP1H-□□□-D
Power supply	100 to 240 VAC 50/60 Hz	24 VDC
Operating voltage range	85 to 264 VAC	20.4 to 26.4 VDC (21.6 to 26.4 VDC with four or more Expansion Units.)
Power consumption	Can be used for backing up programs or auto-booting.	50 W max.
Inrush current	100 to 120 VAC inputs: 20 A max. 8 ms max./200 to 240 VAC inputs: 40 A max. 8 ms max.	30 A max. 20 ms max.
External power supply	300 mA at 24 VDC	None
Insulation resistance	20 M min. (at 500 VDC) between the external AC terminals and GR terminals	20 M min. (at 500 VDC) between the external DC terminals and GR terminals
Dielectric strength	2,300 VAC at 50/60 Hz for 1 min between the external AC and GR terminals, leakage current: 5 mA max.	1,000 VAC at 50/60 Hz for 1 min between the external DC and GR terminals, leakage current: 5 mA max.
Noise immunity	Conforming to IEC 61000-4-4, 2 kV (power supply line)	
Vibration resistance	10 to 57 Hz, 0.075-mm amplitude, 57 to 150 Hz, acceleration: 9.8 m/s ² in X, Y, and Z directions for 80 minutes each (Sweep time: 8 minutes x 10 sweeps = total time 80 minutes)	
Shock resistance	147 m/s ² , three times each in X, Y, and Z directions	
Ambient operating temperature	0 to 55°C	
Ambient humidity	10% to 90% (with no condensation)	
Ambient operating environment	No corrosive gas	
Ambient storage temperature	-20 to 75°C (Excluding battery.)	
Power holding time	10 ms min.	2 ms min.
Dimensions	150 x 90 x 85 mm (W x H x D)	
Weight	740 g max.	590 g max.

Item	XA CPU Units: CP1H-XA□□□□	X CPU Units: CP1H-X□□□□	Y CPU Units: CP1H-Y□□□□
Control method	Stored program method		
I/O control method	Cyclic scan with immediate refreshing		
Program language	Ladder diagram		
Function blocks	Maximum number of function block definitions: 128 Maximum number of instances: 256 Languages usable in function block definitions: Ladder diagrams, structured text (ST)		
Instruction length	1 to 7 steps per instruction		
Instructions	Approx. 400 (function codes: 3 digits)		
Instruction execution time	Basic instructions: 0.10 μs min. Special instructions: 0.15 μs min.		
Common processing time	0.7 ms		
Program capacity	20 Ksteps		
Number of tasks	288 (32 cyclic tasks and 256 interrupt tasks) Scheduled interrupt tasks: 1 (interrupt task No. 2, fixed) Input interrupt tasks: 8 (interrupt task No. 140 to 147, fixed), 6 for Y CPU Units High-speed counter interrupt tasks: 256 (interrupt task No. 0 to 255)		
Maximum subroutine number	256		
Maximum jump number	256		
I/O areas	Input bits	1,600 bits (100 words): CIO 0.00 to CIO 99.15 (The 24 built-in inputs are allocated in CIO 0.00 to CIO 0.11 and CIO 1.00 to CIO 1.11.)	
	Output bits	1,600 bits (100 words): CIO 100.00 to CIO 199.15 (The 16 built-in outputs are allocated in CIO 100.00 to CIO 100.07 and CIO 101.00 to CIO 101.07.)	
	Built-in Analog Inputs	CIO 200 to CIO 203	
	Built-in Analog Outputs	CIO 210 to CIO 211	
	Serial PLC Link Area	1,440 bits (90 words): CIO 3100.00 to CIO 3189.15 (CIO 3100 to CIO 3189)	
Work bits	8,192 bits (512 words): W000.00 to W511.15 (W0 to W511) 37,504 bits (2,344 words): CIO 3800.00 to CIO 6143.15 (CIO 3800 to CIO 6143)		
TR Area	16 bits: TR0 to TR15		
Holding Area	8,192 bits (512 words): H0.00 to H511.15 (H0 to H511)		
AR Area	Read-only (Write-prohibited): 7168 bits (448 words): A0.00 to A447.15 (A0 to A447) Read/Write: 8192 bits (512 words): A448.00 to A959.15 (A448 to A959)		
Timers	4,096 bits: T0 to T4095		
Counters	4,096 bits: C0 to C4095		
DM Area (See note.)	32 Kwords: D0 to D32767		
Data Register Area	16 registers (16 bits): DR0 to DR15		
Index Register Area	6 registers (16 bits): IR0 to IR15		
Task Flag Area	32 flags (32 bits): TK0000 to TK0031		
Trace Memory	4,000 words (500 samples for the trace data maximum of 31 bits and 6 words.)		
Memory Cassette	A special Memory Cassette (CP1W-ME05M) can be mounted. Note: Can be used for program backups and auto-booting.		
Clock function	Supported. Accuracy (monthly deviation): -3.5 min to -0.5 min (ambient temperature: 55°C), -1.5 min to +1.5 min (ambient temperature: 25°C), -3 min to +1 min (ambient temperature: 0°C)		
Communications functions	One built-in peripheral port (USB1.1): For connecting Support Software only. A maximum of two Serial Communications Option Boards can be mounted.		
Memory backup	Flash memory: User programs, parameters (such as the PLC Setup), comment data, and the entire DM Area can be saved to flash memory as initial values. Battery backup: The Holding Area, DM Area, and counter values (flags, PV) are backed up by a battery.		
Battery service life	5 years at 25°C. (Use the replacement battery within two years of manufacture.)		
Built-in input terminals	40 (24 inputs, 16 outputs)	20 (12 inputs, 8 outputs) Line-driver inputs: Two axes for phases A, B, and Z Line-driver outputs: Two axes for CW and CCW	
Number of connectable Expansion (I/O) Units	CPM1A Expansion I/O Units: 7 max.; CJ-series Special I/O Units or CPU Bus Units: 2 max.		
Max. number of I/O points	320 (40 built in + 40 per Expansion (I/O) Unit x 7 Units)	300 (20 built in + 40 per Expansion (I/O) Unit x 7 Units)	
Interrupt inputs	8 inputs (Shared by the external interrupt inputs (counter mode) and the quick-response inputs.)		6 inputs (Shared by the external interrupt inputs (counter mode) and the quick-response inputs.)
Interrupt inputs counter mode	8 inputs (Response frequency: 5 kHz max. for all interrupt inputs), 16 bits		6 inputs (Response frequency: 5 kHz max. for all interrupt inputs), 16 bits
Quick-response inputs	8 points (Min. input pulse width: 50 μs max.)		6 points (Min. input pulse width: 50 μs max.)
Scheduled interrupts	1		

Item	XA CPU Units: CP1H-XA□□□□□□	X CPU Units: CP1H-X□□□□□□	Y CPU Units: CP1H-Y□□□□□□
High-speed counters	4 inputs: Differential phases (4x), 50 kHz or Single-phase (pulse plus direction, up/down, increment), Value range: 32 bits, Linear mode or ring mode Interrupts: Target value comparison or range comparison		2 inputs: Differential phases (4x), 500 kHz or Single-phase, 1 MHz and 2 inputs: Differential phases (4x), 50 kHz or Single-phase (pulse plus direction, up/down, increment), 100 kHz Value range: 32 bits, Linear mode or ring mode Interrupts: Target value comparison or range comparison
Pulse outputs (models with transistor outputs only)	Trapezoidal or S-curve acceleration and deceleration (Duty ratio: 50% fixed) 2 outputs, 1 Hz to 100 kHz (CCW/CW or pulse plus direction) 2 outputs, 1 Hz to 30 kHz (CCW/CW or pulse plus direction) PWM outputs (Duty ratio: 0.0% to 100.0% (Unit: 0.1%) 2 outputs, 0.1 to 1 kHz (Accuracy: ±5% at 1 kHz)		Trapezoidal or S-curve acceleration and deceleration (Duty ratio: 50% fixed) 2 outputs, 1 Hz to 1 MHz (CCW/CW or pulse plus direction) 2 outputs, 1 Hz to 30 kHz (CCW/CW or pulse plus direction) PWM outputs (Duty ratio: 0.0% to 100.0% (Unit: 0.1%) 2 outputs, 0.1 to 1 kHz (Accuracy: ±5% at 1 kHz)
Built-in analog I/O terminals	4 analogue inputs and 2 analogue outputs (Refer to separate detailed specifications.)	None	
Analogue control	1 (Setting range: 0 to 255)		
External analogue input	1 input (Resolution: 1/256, Input range: 0 to 10 V)		

• Serial Communications Specifications


Item	Function	Interface
Peripheral USB port	For connecting Peripheral Device.	Conforms to USB 1.1, B-type connector
Serial port 1	Host Link, No-protocol, NT Link (1: N), Serial PLC Link (See note.), Serial Gateway (CompoWay/F master, Modbus-RTU master), Modbus-RTU easy master function	The CP1W-CIF01 RS-232C Option Board 
Serial port 2	Host Link, No-protocol, NT Link (1: N), Serial PLC Link (See note.), Serial Gateway (CompoWay/F master, Modbus-RTU master), Modbus-RTU easy master function	or the CP1W-CIF11 RS-422A/485 Option Board  can be used with either port.

Note: Serial PLC Link can be used with either serial port 1 or serial port 2.

• Analogue I/O Specifications (CP1H-XA CPU Units Only)




Item	Voltage I/O	Current I/O
Analogue Input Section	Number of analog inputs	4
	Input signal range	0 to 5 V, 1 to 5 V, 0 to 10 V, or -10 to 10 V
	Max. rated input	±15 V
	External input impedance	1 M min.
	Resolution	1/6,000 or 1/12,000 (full scale)
	Overall accuracy	25°C: ±0.3% full scale/0 to 55°C: ±0.6% full scale
	A/D conversion data	Full scale for -10 to 10 V: F448 (E890) to 0BB8 (1770) Hex Full scale for other ranges: 0000 to 1770 (2EE0) Hex
	Averaging	Supported (Set for individual inputs in the PLC Setup.)
Analogue Output Section	Open-circuit detection	Supported (Value when disconnected: 8000 Hex)
	Number of outputs	2 outputs
	Output signal range	0 to 5 V, 1 to 5 V, 0 to 10 V, or -10 to 10 V
	Allowable external output load resistance	1 k min.
	External output impedance	0.5 max.
	Resolution	1/6,000 or 1/12,000 (full scale)
	Overall accuracy	25°C: ±0.4% full scale/0 to 55°C: ±0.8% full scale
	D/A conversion data	Full scale for -10 to 10 V: F448 (E890) to 0BB8 (1770) hex Full scale for other ranges: 0000 to 1770 (2EE0) hex
Conversion time	1 ms/point	
Isolation method	Photocoupler isolation between analogue I/O terminals and internal circuits. No isolation between analogue I/O signals.	

• Dimensions CP1H CPU Units

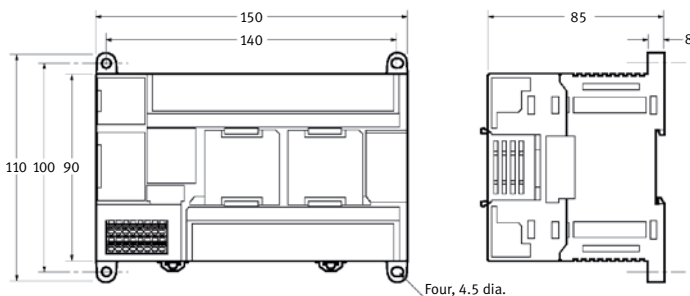

Ordering information

CPU Units •

CPU Unit	Specifications				Model	Standards
	Power supply	Output method	Inputs	Outputs		
CP1H-X CPU Units Memory capacity: 20 Ksteps High-speed counters: 100 kHz, 4 axes Pulse outputs: 100 kHz, 2 axes kHz, 2 axes 30 	AC	Relay	24	16	CP1H-X40DR-A	CE, N
	DC	(Transistor (sinking			CP1H-X40DT-D	CE, N
		(Transistor (sourcing			CP1H-X40DT1-D	CE, N
CP1H-XA CPU Units Memory capacity: 20 Ksteps High-speed counters: 100 kHz, 4 axes Pulse outputs: 100 Hz, 2 axes 30 kHz, 2 axes Analogue inputs: 4 Analogue outputs: 2 	AC	Relay	24	16	CP1H-XA40DR-A	CE, N
	DC	(Transistor (sinking			CP1H-XA40DT-D	CE, N
		(Transistor (sourcing			CP1H-XA40DT1-D	CE, N
CP1H-Y CPU Units Memory capacity: 20 Ksteps High-speed counters: 1 MHz, 2 axes 100 kHz, 2 axes Pulse outputs: 1 MHz, 2 axes kHz, 2 axes 30 	DC	(Transistor (sinking	12+line-driver input, 2 axes	line-driver+ 8 input, 2 axes	CP1H-Y20DT-D (.To be released soon)	-

(Options (for CPU Units •

Name	Specifications	Model	Standards
RS-232C Option Board	.For CPU Unit option port	CP1W-CIF01	CE, N
RS-422A/485 Option Board	.For CPU Unit option port	CP1W-CIF11	CE, N
Memory Cassette	.Can be used for backing up programs or auto-booting	CP1W-ME05M	CE, N

Maintenance Products •

Name	Specifications	Model	Standards
Battery Set	(.For CP1H CPU Units (Use batteries within two years of manufacture	CJ1W-BAT01	CE
DIN Track	Length: 0.5 m; Height: 7.3 mm	PPF-50N	
	Length: 1 m; Height: 7.3 mm	PPF-100N	
	Length: 1 m; Height: 16 mm	PPF-100N2	
End Plate	.There are 2 stoppers provided with CPU Units and I/O Interface Units as standard accessories to secure the Units on the DIN Track	PPF-M	

I/O Connecting Cable •

Name	Specifications	Model	Standards
I/O Connecting Cable	(cm (for CPM1A Expansion Units 80	CP1W-CN811	CE, N

Programming Devices •

Name	Specifications	Model	Standards	
CX-One FA Integrated Tool Package	CX-One is a package that integrates the Support Software for OMRON PLCs and components. CX-One runs on the following OS OS: Windows 98SE, Me, NT 4.0 (Service Pack 6a), 2000 (Service Pack 3 or higher), or XP CX-One Includes CX-Programmer Ver.6.□ and CX-Simulator Ver.1.□.For details, refer to the CX-One catalog (Cat. No. R134). .For CPU Unit option port. Can be used for backing up programs or auto-booting	One license	CXONE-AL01C-E	-
		Three licenses	CXONE-AL03C-E	-
		Ten licenses	CXONE-AL10C-E	-
Computer Connecting Cable for CP1W-CIF01 RS-232C (.Option Board (See note	(D-Sub 9-pin (Length: 2.0 m	For anti-static connectors	XW2Z-200S-CV	-
	(D-Sub 9-pin (Length: 5.0 m		XW2Z-500S-CV	-
	(D-Sub 9-pin (Length: 2.0 m		XW2Z-200S-V	-
	(D-Sub 9-pin (Length: 5.0 m		XW2Z-500S-V	-
USB-Serial Conversion Cable (.See note)	USB-RS-232C Conversion Cable (Length: 0.5 m) and PC Complies with USB Specification 1.1 (On personal computer side: USB (A plug connector, male (On PLC side: RS-232C (D-sub 9-pin, male Driver: Supported by Windows 98, Me, 2000, and XP		CS1W-CIF31	-

Note: Cannot be used with a peripheral USB port. To connect to a personal computer via a peripheral USB port, use commercially-available USB cable (A to B type, male).

Technical Documentation •

Name	Standards
CP1H CPU Unit Operation Manual	W450-E1
CP1H CPU Unit Programming Manual	W451-E1

Expansion Units •

Name	Output method	Inputs	Outputs	Model	Standards
Expansion I/O Units	Relay	24	16	CPM1A-40EDR	CE, N
	(Transistor (sinking (Transistor output (sourcing			CPM1A-40EDT	CE, N
	Relay	12	8	CPM1A-40EDT1	CE, N
	(Transistor (sinking (Transistor output (sourcing			CPM1A-20EDR1	U, C, CE
	-	8	-	CPM1A-20EDT	U, C, N, CE
	Relay			CPM1A-20EDT1	U, C, N, CE
	(Transistor (sinking (Transistor output (sourcing	-	8	CPM1A-8ED	U, C, N, CE
	-	-	8	CPM1A-8ER	U, C, N, CE
(Transistor (sinking (Transistor output (sourcing	-	8	CPM1A-8ET	U, C, N, CE	
-	-	-	CPM1A-8ET1	U, C, N, CE	
Analogue Input Unit	(Analogue (resolution: 1/6000	4	-	CPM1A-AD041	U, C, N, CE
Analogue Output Unit	(Analogue (resolution: 1/6000	-	4	CPM1A-DA041	UC1, CE
Analogue I/O Units	(Analogue (resolution: 1/256	2	1	CPM1A-MAD01	UC1, CE
	(Analogue (resolution: 1/6000	2	1	CPM1A-MAD11	U, C, N, CE
DeviceNet I/O Link Unit	-	(I/O link bits) 32	(I/O link bits) 32	CPM1A-DRT21	U, C, CE
CompoBus/S I/O Link Unit	-	(I/O link bits) 8	(I/O link bits) 8	CPM1A-SRT21	U, C, N, CE
PROFIBUS-DP I/O Link Unit	-	(I/O link bits) 16	(I/O link bits) 16	CPM1A-PRT21	CE
Temperature Sensor Units	thermocouple inputs 2	-	-	CPM1A-TS001	U, C, N, CE
	thermocouple inputs 4	-	-	CPM1A-TS002	U, C, N, CE
	platinum resistance thermometer inputs 2	-	-	CPM1A-TS101	U, C, N, CE
	platinum resistance thermometer inputs 4	-	-	CPM1A-TS102	U, C, N, CE
	(platinum resistance thermometer inputs, 1 Analogue output (resolution: 256 2	-	-	CPM1A-TS101-DA	U, C, L, CE

CJ-series Special I/O Units and CPU Bus Units •

Category	Name	Specifications	Model	Standards	
CP1H CPU Unit options	CJ Unit Adapter	(Adapter for connecting CJ-series Special I/O Units and CPU Bus Units (includes CJ-series End Cover	CP1W-EXT01	UC1, CE, N, L	
CJ-series Special I/O Units	Analogue Input Units	(inputs (1 to 5 V, 0 to 5 V, 0 to 10 V, -10 to 10 V, 4 to 20 mA 8 (.Resolution: 1/8,000; Conversion speed: 250 µs/input max. (Can be set to 1/4,000 resolution and 1 ms/input	CJ1W-AD081-V1	UC1, CE, N, L	
		(inputs (1 to 5 V, 0 to 5 V, 0 to 10 V, -10 to 10 V, 4 to 20 mA 4 (.Resolution: 1/8,000; Conversion speed: 250 µs/input max. (Can be set to 1/4,000 resolution and 1 ms/input	CJ1W-AD041-V1		
	Analogue Output Units	(outputs (1 to 5 V, 0 to 5 V, 0 to 10 V, -10 to 10 V 8 (Resolution: 1/4,000; Conversion speed: 1 ms/output max. (Can be set to 1/8000, 250 µs/output	CJ1W-DA08V		
		(outputs (4 to 20 mA 8 (Resolution: 1/4,000; Conversion speed: 1 ms/output max. (Can be set to 1/8,000, 250 µs/output	CJ1W-DA08C		
		(outputs (1 to 5 V, 0 to 5 V, 0 to 10 V, -10 to 10 V, 4 to 20 mA 4 (.Resolution: 1/4,000, Conversion speed: 1 ms/point max	CJ1W-DA041		
		(outputs (1 to 5 V, 0 to 5 V, 0 to 10 V, -10 to 10 V, 4 to 20 mA 2 (.Resolution: 1/4,000; Conversion speed: 1 ms/output max	CJ1W-DA021		
	Analogue I/O Unit	(inputs, 2 outputs (1 to 5 V, 0 to 5 V, 0 to 10 V, -10 to 10 V, 4 to 20 mA 4 (Resolution: 1/4000; Conversion speed: 1 ms/point max. (Can be set to 1/8,000, 250 µs/point	CJ1W-MAD42		
	Process Input Units	inputs, B, J, K, L, R, S, T; Conversion speed: 250 ms/4 inputs 4	CJ1W-PTS51		
		inputs, Pt100 (JIS, IEC), JPt100 , Conversion speed: 250 ms/4 inputs 4	CJ1W-PTS52		
		,inputs, B, E, J, K, L, N, R, S, T, U, W, Re5-26, PL ±100 mV 2 Resolution: 1/64,000; Conversion speed: 10 ms/2 inputs	CJ1W-PTS15		
		;inputs, Pt100, JPt100, Pt50, Ni508.4 2 Resolution: 1/64,000; Conversion speed: 10 ms/2 inputs	CJ1W-PTS16		
		,inputs, 0 to 1.25 V, -1.25 to 1.25 V, 0 to 5 V, 1 to 5 V, -5 to 5 V, 0 to 10 V 2 to 10V, ±10-V selectable range, 0 to 20 mA, 4 to 20 mA 10-	CJ1W-PDC15		
	Temperature Control Units	loops, thermocouple input, NPN output 4	CJ1W-TC001		
		loops, thermocouple input, PNP output 4	CJ1W-TC002		
loops, thermocouple input, NPN output, heater burnout detection function 2		CJ1W-TC003			
loops, thermocouple input, PNP output, heater burnout detection function 2		CJ1W-TC004			
loops, platinum resistance thermometer input, NPN output 4		CJ1W-TC101			
loops, platinum resistance thermometer input, PNP output 4		CJ1W-TC102			
loops, platinum resistance thermometer input, NPN output, heater burnout detection function 22		CJ1W-TC103			
loops, platinum resistance thermometer input, PNP output, heater burnout detection function 2		CJ1W-TC104			
CompoBus/S Master Unit		.CompoBus/S remote I/O, 256 points max	CJ1W-SRM21		
PROFIBUS-DP Slave Unit		Exchanges up to 180 words in any memory area with a PROFIBUS-DP Master Unit	CJ1W-PRT21		
CJ-series CPU Bus Units	Controller Link Units	(Wired (Shielded twisted-pair cable	CJ1W-CLK21-V1	UC1, CE, N, L	
	Serial Communications Units	RS-232C port and 1 RS-422A/485 port 1	CJ1W-SCU41-V1		
		RS-232C ports 2	CJ1W-SCU21-V1		
		100Base-TX	CJ1W-ETN21		
	DeviceNet Unit	.Functions as master and/or slave; allows control of 32,000 points max. per master	CJ1W-DRM21		
	PROFIBUS-DP Master Unit	Controls up to 7000 words of remote I/O data over PROFIBUS-DP	CJ1W-PRM21		UC, CE
	CAN Unit	Can send and/or receive any CAN-Message	CJ1W-CORT21		CE

OMRON EUROPE B.V. Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. Tel: +31 (0) 23 568 13 00 Fax: +31 (0) 23 568 13 88 www.omron-industrial.com

Austria

Tel: +43 (0) 1 80 19 00
www.omron.at

Belgium

Tel: +32 (0) 2 466 24 80
www.omron.be

Czech Republic

Tel: +420 234 602 602
www.omron.cz

Denmark

Tel: +45 43 44 00 11
www.omron.dk

Finland

Tel: +358 (0) 207 464 200
www.omron.fi

France

Tel: +33 (0) 1 56 63 70 00
www.omron.fr

Germany

Tel: +49 (0) 2173 680 00
www.omron.de

Hungary

Tel: +36 (0) 1 399 30 50
www.omron.hu

Italy

Tel: +39 02 32 68 777
www.omron.it

Middle East & Africa

Tel: +31 (0) 23 568 11 00
www.omron-industrial.com

Netherlands

Tel: +31 (0) 23 568 11 00
www.omron.nl

Norway

Tel: +47 (0) 22 65 75 00
www.omron.no

Poland

Tel: +48 (0) 22 645 78 60
www.omron.pl

Portugal

Tel: +351 21 942 94 00
www.omron.pt

Russia

Tel: +7 495 745 26 64
www.omron.ru

Spain

Tel: +34 913 777 900
www.omron.es

Sweden

Tel: +46 (0) 8 632 35 00
www.omron.se

Switzerland

Tel: +41 (0) 41 748 13 13
www.omron.ch

Turkey

Tel: +90 (0) 216 474 00 40
www.omron.com.tr

United Kingdom

Tel: +44 (0) 870 752 08 61
www.omron.co.uk

More Omron representatives
www.omron-industrial.com

Authorised Distributor:

Control Systems

- Programmable logic controllers • Human-machine interfaces • Remote I/O

Motion & Drives

- Motion controllers • Servo systems • Inverters

Control Components

- Temperature controllers • Power supplies • Timers • Counters • Programmable relays
- Digital panel indicators • Electromechanical relays • Monitoring products • Solid-state relays
- Limit switches • Pushbutton switches • Low voltage switch gear

Sensing & Safety

- Photoelectric sensors • Inductive sensors • Capacitive & pressure sensors • Cable connectors
- Displacement & width-measuring sensors • Vision systems • Safety networks • Safety sensors
- Safety units/relay units • Safety door/guard lock switches