

XPECTIA-Lite VISION SENSOR

Easy inspection beyond expectation



» Intuitive user guidance

» Crystal-clear imaging

» Flexible Vision platform

Simple, flexible & crystal clear

The new Xpectia-Lite integrates the benefits of a smart camera and a powerful vision system in a single platform.

The unique image clarity achieved by using an intelligent camera enables simple setup, fast installation and enhanced optical performance.

In combination with the powerful Xpectia-Lite controller it takes you into a new dimension of image processing. Highest performance, simplicity and unique flexibility are defining a new standard for compact vision sensors.

Features

- Crystal-clear image quality
- Real colour processing (16 million colours)
- C-mount and smart cameras
- EtherNet/IP & TCP/IP communication

Benefits



- Simple and guided set-up
- Reliable results on any surface
- One platform for any application



Intelligent Compact Camera

Lite Controller

Monitor

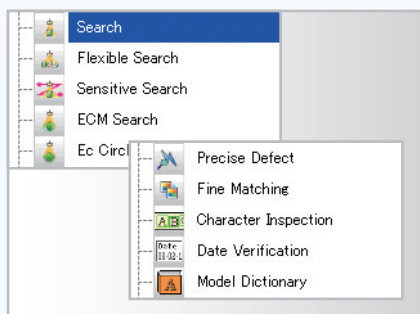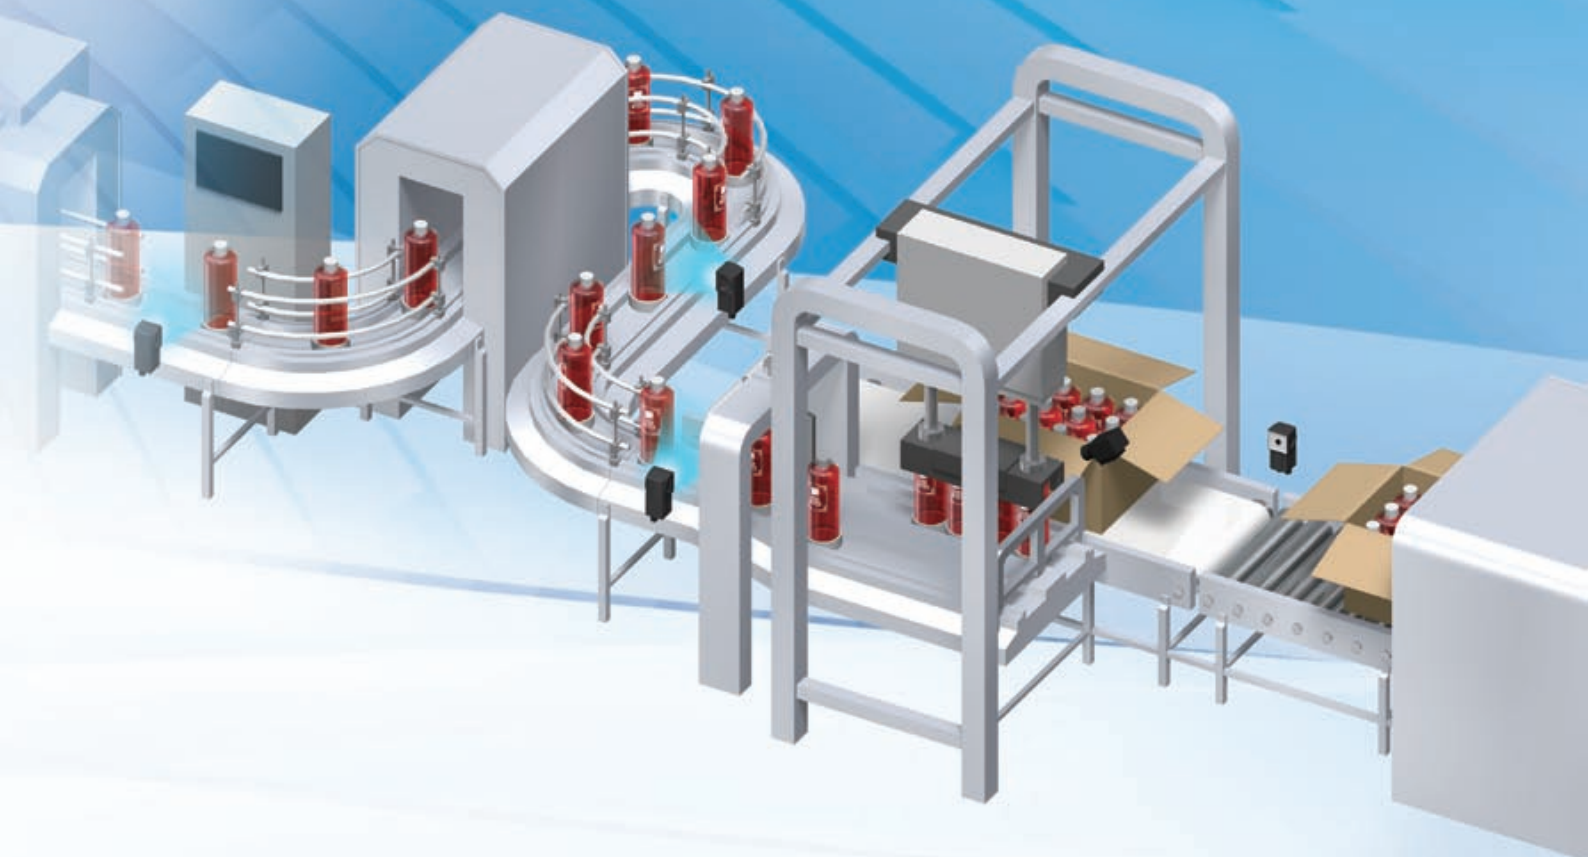

Flexible Flow Configuration

Xpectia-Lite supports the smart camera technology from the FQ-series sensors. This allows fast and easy installation of the camera on the machine, without further optics and illumination. Crystal clear images can be easily captured using high-power lighting and a polarizing filter that eliminates glare.

Simple Operation

More than 20 processing items are provided by Xpectia-Lite, such as dimension measurements, various search items (pattern, contour), defects, edge and count tools. These processing items, can be combined in a flow program, offering branches or loops. This offers a new dimension of flexibility for compact vision sensors.


Open Network

EtherNet/IP, a global standard for factory automation data networking, is supported for seamless integration into a production line or machine. This allows users to easily connect to any EtherNet/IP enabled devices from any manufacturer. Further communication is possible via TCP/IP, serial and parallel interfaces.

Powerful processing items for any inspection and industry

Flexible Application


Measurements



Dimension Measurements

Scan Edge Width

Multiple measurements can be performed on the objects for their minimum width, maximum width, and average width. Enhanced performance is also provided to detect the depth of grooves on metal shafts.



Workpiece Count

Labelling

A cluster of objects is extracted as labels, and the parameters for area, center of gravity, and other factors are generated for output and further processing. Perform measurements for roundness, enclosing rectangles, and circumference measurement. Counting by sorting of the labels according to coordinates or size can also be performed.

Appearance Inspections




Inspection of Defects

Defects

Perform inspection of defects and dirt on solid-coloured objects, component chips or burrs.

Fine Matching


Fine Matching is ideal when the background has a pattern. In combination with the standard image it enables high-speed, high-precision inspection for minute dirt and edge chips.



Detection of Subtle Differences

Sensitive Search

Detailed matching is performed by automatically separating a registered image. Subtle differences that cannot be determined using normal searches are detected with good stability and correlation difference. So, there's no need for accurate threshold settings.



Character Inspections



Inspection of Expiration Dates Date Verification

By simply setting the period of production, the character string can be automatically verified and the printing can be easily validated. The printed expiration date is changed automatically every day.





Prevention of False Rejections Flexible Search

Inspection can be performed to accept items with variations in printing quality and shape, and to reject only those items that are obviously wrong. Registering multiple images of acceptable items as models enables stable searching regardless of the printing quality or changes in shape.



21 Inspection and Measurement Items

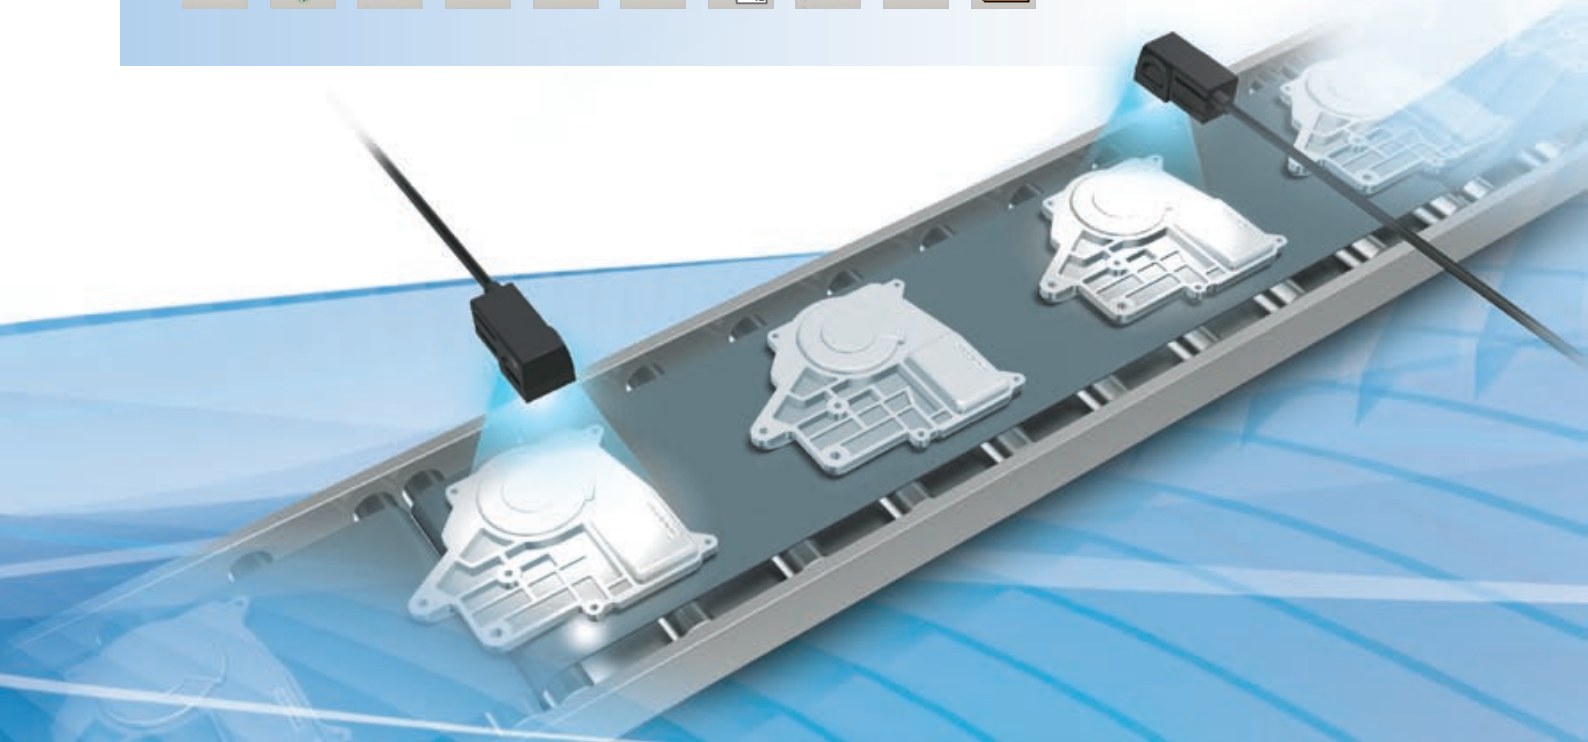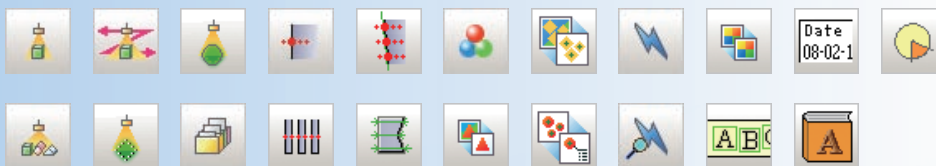

A new benchmark in image clarity

Simple Operation


Achieving sharp and crystal clear images that improve inspection performance has never been so easy. The Xpectia-Lite features powerful functions, to eliminate the effects of direct reflections, environmental light interference and big variations in brightness. These cutting edge functions

shorten and simplify the installation and setup procedure and sensitive camera angle setup is all but eliminated.

Camera with integrated High-power Lighting


The Camera utilises integrated high-power lighting that enables uniform illumination in the field of view. Using a new optical design, bright and clear images can be achieved without additional lighting.

A polarizing filter can be used to cut direct light reflections to eliminate the common issue of glare resulting from highly reflective surfaces.

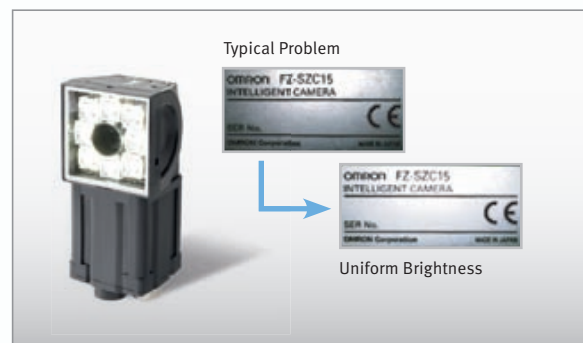


HDR Sensing

A High Dynamic Range (HDR) function is provided to eliminate the influence of objects with irregular reflectance and changes in external light conditions. By increasing the HDR by a factor of up to 5,000, objects that previously could not be detected due to inconsistent lighting or halation can be clearly inspected.

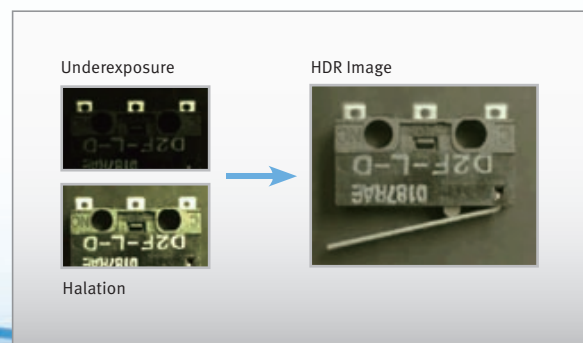


Real Colour Sensing

Colour sensing is standard for Omron vision sensors. Real colour processing enables stable detection of minute colour differences, which is difficult to perform using colour grey processing or filtering. It is not necessary to perform colour extraction or redo the setup every time the workpiece colour changes.

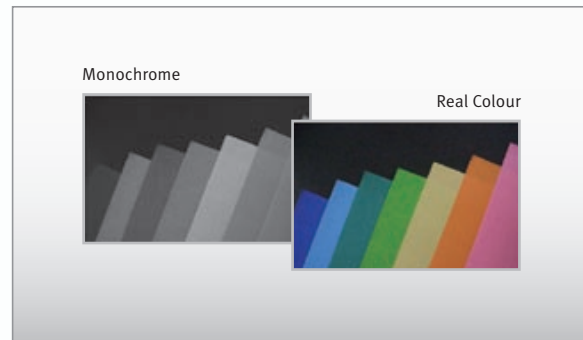

2 Million Pixel Camera

Inspections that require high resolution can be solved with the 2 million pixel camera. Presence and dimension inspections can be realized. At a rate of 30 frames per second. The input speed is the highest in this class. The use of a C-mount lens enables applications in any field of view.

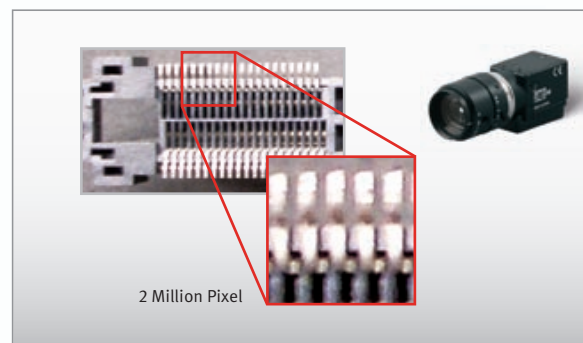

Choose the interface you need


Open Network

A variety of interfaces, such as EtherNet/IP, general-purpose Ethernet, and serial communications allows easy communication with a PLC or other external devices.

EtherNet/IP

Easier, Faster

EtherNet/IP is a widely used communication protocol in factories around the world. You can easily connect to Omron PLCs or any other vendor device that supports EtherNet/IP to enable high-speed communication.

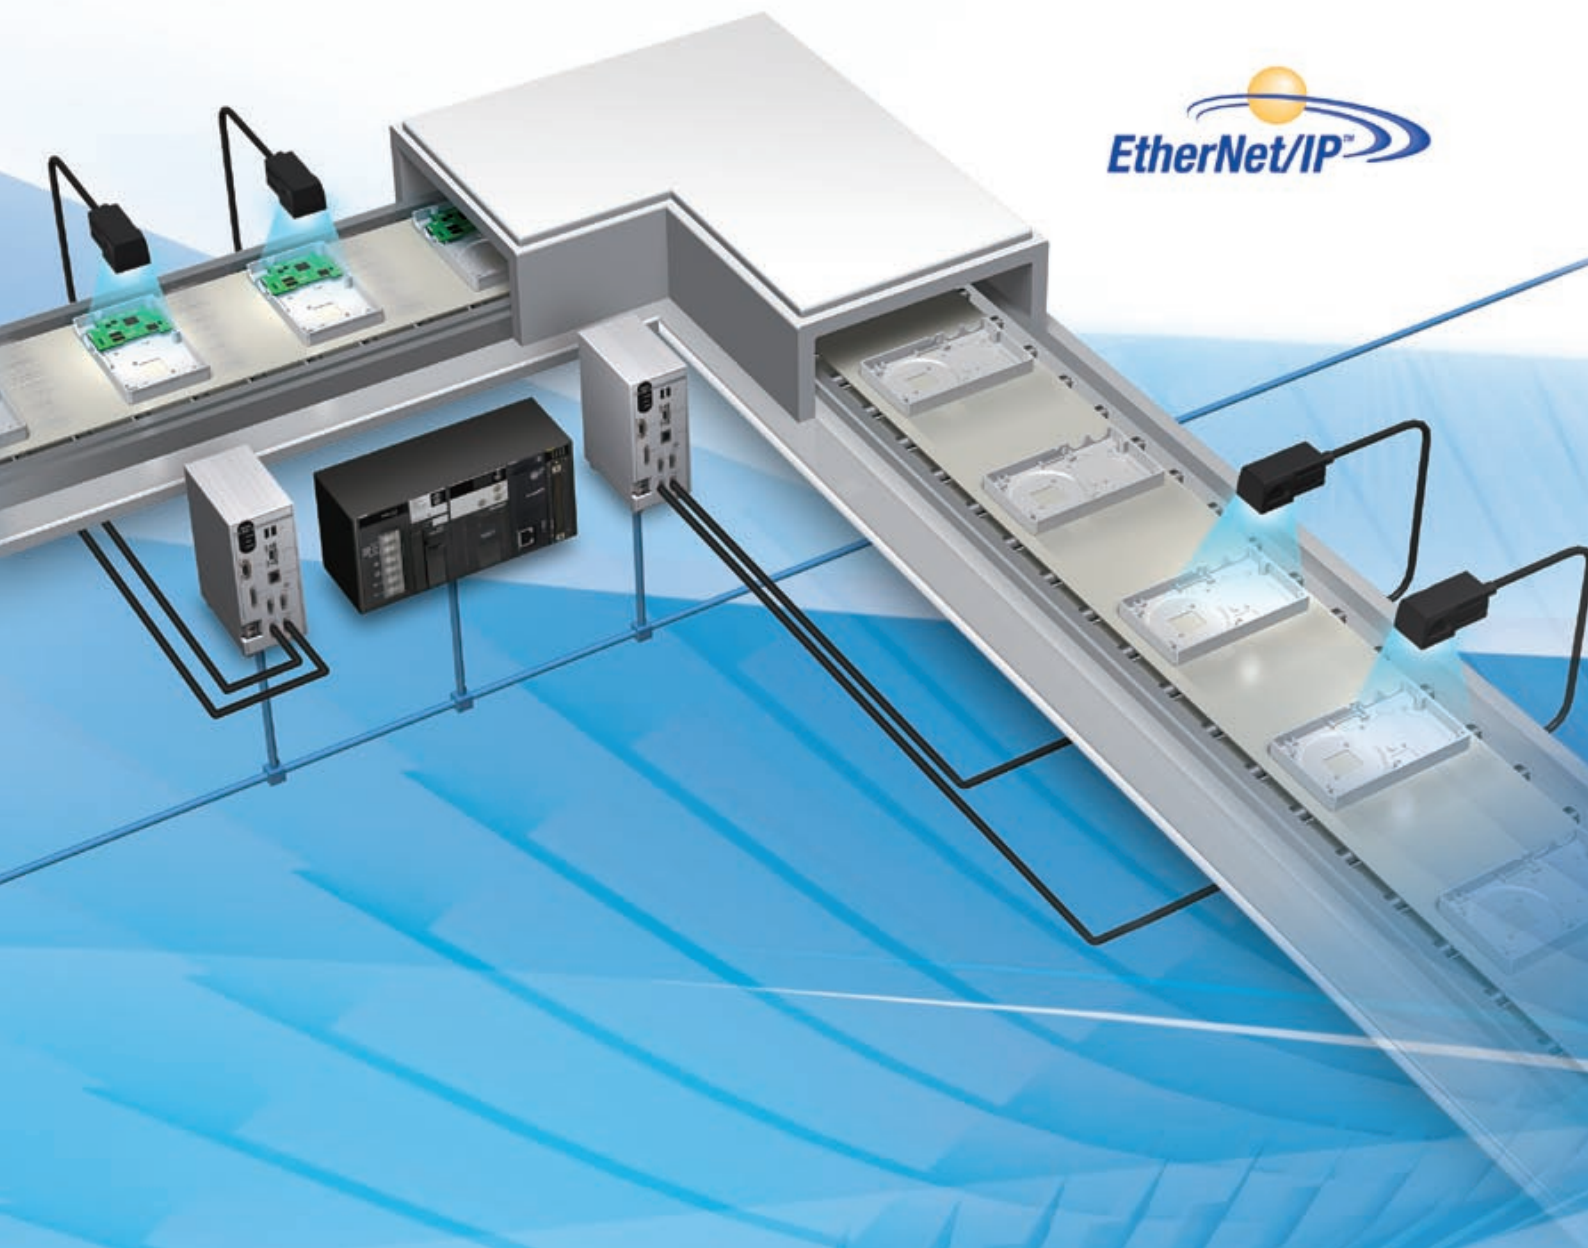



EtherNet/IP™

PLC Link Function

Easy Creation of Ladder Programs


A PLC Link function is included to reduce the effort in ladder programming for serial communications and standard Ethernet.

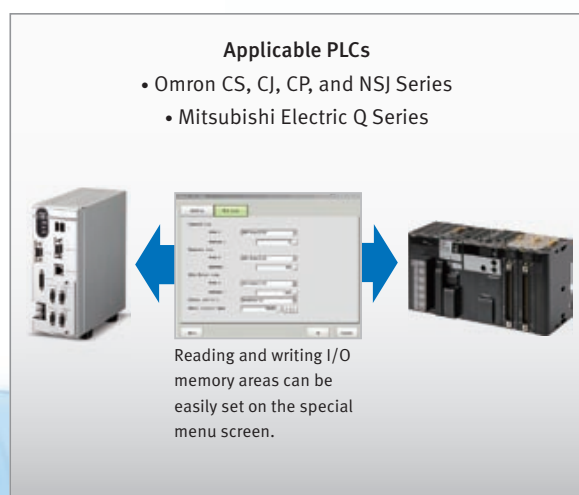

Network Drive Function

Network Logging

The network drive function in Xpectia-Lite allows users to output and store images and measurement values to computers over a network, not limited to internal or only to USB memory. Connecting a large-capacity hard drive enables long-term image logging. It can also be used for storage of configuration data. Back-up and restore of any data over the network is also supported.

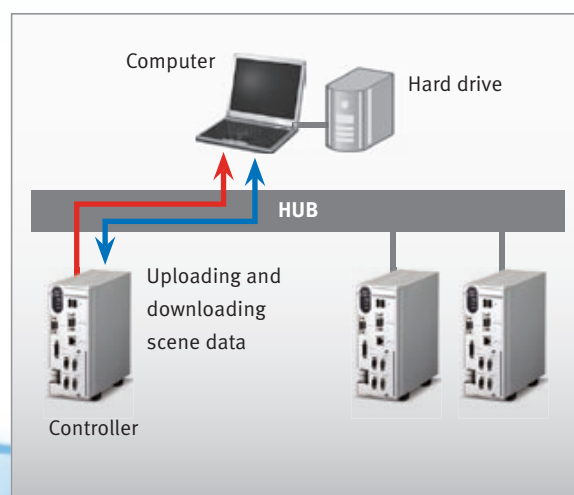

Compact controller

2 USB connectors

RS232C connector


RJ45 Ethernet connector

4 Camera connectors



Ordering Information





Controllers

Appearance	Type		Model	Remarks
	Lite Controllers	Two-camera controllers	NPN FZ3-L350	—
			PNP FZ3-L355	—
	Four-camera controllers	NPN FZ3-L350-10	—	
		PNP FZ3-L355-10	—	









Cameras

Appearance	Type		Model	Remarks
	Intelligent Compact Cameras	Wide View (Short-distance) □100mm	Color FZ-SQ100N	Camera +Lens + High-power Lighting
		Wide View (Long-distance) □100mm	Color FZ-SQ100F	
		Standard □50mm	Color FZ-SQ050F	
		Narrow View □10mm	Color FZ-SQ010F	
	Intelligent Cameras	Wide field of vision	Color FZ-SLC100	Camera + Zoom, Autofocus Lens + Intelligent Lighting
		Narrow field of vision	Color FZ-SLC15	
	Autofocus Cameras	Wide field of vision	Color FZ-SZC100	Camera + Zoom, Autofocus Lens
		Narrow field of vision	Color FZ-SZC15	
	Digital Cameras	2 million pixels	Color FZ-SC2M	Lens required
			Monochrome FZ-S2M	
	Digital Cameras	300,000-pixels	Color FZ-SC	
			Monochrome FZ-S	
	Small Digital Cameras	300,000-pixel flat type	Color FZ-SFC	
			Monochrome FZ-SF	
	Small Digital Cameras	300,000-pixel pen type	Color FZ-SPC	
			Monochrome FZ-SP	
	High-speed Cameras	300,000-pixels	Color FZ-SHC	
			Monochrome FZ-SH	

Cameras peripheral devices





Appearance	Type	Model	Remarks
	CCTV Lenses	3Z4S-LE Series	—
	Extension Tubes		—
	Low-distortion Lenses	FZ-LEH5/LEH8/LEH12/LEH16/ LEH25/LEH35/LEH50/LEH75/ LEH100	Low distortion lens for 2-million Pixel Cameras
	Lenses for Small Camera	FZ-LES3/LES6/LES16/LES30	Lens for 300,000-pixel Small Cameras
	Extension Tubes for Small Camera	FZ-LESR	Extension Tubes for 300,000-pixel Small Cameras
	Intelligent Camera Diffusion Plate	Wide field of vision FZ-SLC100-DL	—
		Narrow field of vision FZ-SLC15-DL	—

Cables

Appearance	Type	Cable length:	Model	Remarks
	Camera Cable	2m, 5m, 10m (See note 2)	FZ-VS	—
	Bend resistant Camera Cables	2m, 5m, 10m (See note 3)	FZ-VSB	—
	Right-angle Camera Cable (See note 1)	2m, 5m, 10m (See note 2)	FZ-VSL	—
	Long-distance Camera Cable	15m (See note 4)	FZ-VS2	—
	Long-distance Right-angle Camera Cable	15m (See note 4)	FZ-VSL2	—
	Cable Extension Unit	Maximum cable length: 45 m (Up to two Extension Units and three Cables can be connected.)	FZ-VSJ	—
	Monitor Cable	2m, 5m	FZ-VM	—
	Parallel Cable	2m, 5m	FZ-VP	—
		2m, 5m, Connector-type	FZ-VPX (See note 5)	—

- Note:**
1. This Cable has an L-shaped connector on the Camera end.
 2. The 10-m Cable cannot be used for the Intelligent Camera and Autofocus Camera.
 3. The 10-m Cable cannot be used for the Intelligent Camera, Autofocus Camera and 2 Million-pixel Camera.
 4. The 15-m Cable cannot be used for the Intelligent Camera and Autofocus Camera.
 5. Connector-Terminal Block Conversion Units can be connected (Recommended Products: OMRON XW2B-50G4/50G5, XE2D-50G6).

Peripheral devices

Appearance	Type		Model	Remarks
	LCD Monitor		FZ-M08	—
	USB Memory		FZ-MEM1G	Capacity: 1 GB
	Strobe Controller	For 3Z4S-LT Series	One channel	Manufactured by MORITEX Corporation 3Z4S-LT MLEK-C100E1TS2
		For FZ-LT Series	One channel	
	Strobe Controller		For FZ-LT Series	Two channels
		—		Mouse
—	External Lighting	3Z4S-LT Series		—
		FZ-LT Series		—

Ratings and Performance

Lite Controller

Model	NPN		FZ3-L350	FZ3-L350-10	
	PNP		FZ3-L355	FZ3-L355-10	
No. of Cameras			2	4	
Processing resolution	With Intelligent Compact Camera		752 (H) × 480 (V)		
	When connected to a 300,000-pixel camera		640 (H) × 480 (V)		
	When connected to a 2 million-pixel camera		1600 (H) × 1200 (V)		
Main functions	Processing Items	Inspections / Measurement	Search, Flexible Search, Sensitive Search, ECM Search, Ec Circle Search, Classification, Edge Position, Edge Pitch, Scan Edge Position, Scan Edge Width, Color Data, Gravity and Area, Labeling, Label Data, Defect, Precise Defect, Fine Matching, Character Inspection, Date Verification, Model Dictionary, Circle Angle		
		Image Capturing	Camera image Input, Camera Image Input HDR, Camera Image Input HDR Lite, Camera Switching, Measurement Image Switching		
		Correcting images	Position Compensation, Filtering, Background Suppression, Color Gray Filter, Extract Color Filter, Anti Color Shading, Polar Transformation		
		Assisting inspections / measurement	Calculation, Line Regression, Circle Regression, Set Unit Data, Get Unit Data, Set Unit Figure, Get Unit Figure, Trend Monitor, Image Logging, Data Logging, Elapsed Time, Wait, Focus, Iris		
		Branching processing	Conditional Branch, End, DI Branch		
		Outputting results	Serial data output, Parallel data output, Parallel judgement output, Fieldbus data output		
		Displaying results on the monitor	Result Display, Display Image File, Display Last NG Image		
	Number of simultaneous inspections ¹		No limit to setting (as permitted by memory capacity)		
	Position compensation		Yes (flexible combination with processing items for inspections and measurements)		
	Number of registered scenes		32		
Number of logged images (See note 1.)	With Intelligent Compact Camera	Connected to 1 camera	214		
		Connected to 2 cameras	107		
		Connected to 3 cameras	71		
		Connected to 4 cameras	53		
	When connected to a 300,000-pixel camera	Connected to 1 camera	Color Camera: 250, Monochrome Camera: 252		
		Connected to 2 cameras	Color Camera: 125, Monochrome Camera: 126		
		Connected to 3 cameras	Color Camera: 83, Monochrome Camera: 84		
		Connected to 4 cameras	Color Camera: 62, Monochrome Camera: 63		
	When connected to a 2 million-pixel camera	Connected to 1 camera	Color Camera: 40, Monochrome Camera: 40		
		Connected to 2 cameras	Color Camera: 20, Monochrome Camera: 20		
		Connected to 3 cameras	Color Camera: 13, Monochrome Camera: 13		
		Connected to 4 cameras	Color Camera: 10, Monochrome Camera: 10		
I/O specifications	Serial communications		RS-232C 1CH		
	Network communications		Ethernet 1000BASE-T/100BASE-TX/10BASE-T		
	EtherNet/IP		Ethernet port baud rate: 100 Mbps (100Base-TX)		
	Parallel I/O		11 inputs (RESET, STEP, DSA, and DI 0 to 7), 26 outputs (RUN, BUSY, GATE, OR, READY, ERROR, STGOUT 0 to 3, and DO 0 to 15)		
Monitor interface			Analog RGB video output, 1 channel (Resolution: XGA 1,024 × 768 dots)		
USB interface			2 channels (supports USB 1.1 and 2.0)		
Operation			Mouse or similar device		
Settings			Create series of processing steps by editing the flowchart (Help messages provided).		
Ratings	Power supply voltage (See note 2.)		20.4 to 26.4 VDC		
	Current consumption (See note 3.) (at 24.0 VDC)	With Intelligent Compact Camera			
		When connected to an intelligent or autofocus camera	4.0 A max.	5.5 A max.	
		When connected to a 300,000-pixel camera			
When connected to a 2 million-pixel camera		2.6 A max.	2.9 A max.		
Environmental immunity	Ambient temperature range		Operating: 0 to 50 °C, Storage: -25 to 65 °C (with no icing or condensation)		
	Ambient humidity range		Operating and storage: 35% to 85% (with no condensation)		
	Ambient atmosphere		No corrosive gas		
	Degree of protection		IEC 60529 IP20		
Materials			Plating steel board		
Weight			Approx. 1.8kg		
Accessories			Instruction Manual		

Note: 1. The number of logged images will vary when connecting multiple Cameras with different models.

2. Do not ground the positive terminal of the 24-VDC power supply to the Lite Controller.

If the positive terminal is grounded, electrical shock may occur when an SG (0-V) part, such as the case of the Controller or Camera, is touched.

3. The current consumption when the maximum number of Cameras supported by each Controller are connected. If a strobe Controller model is connected to a lamp, the current consumption is as high as when an Intelligent Camera is connected.

LCD Monitor

Model	FZ-M08
Size	8.4 inches
Type	Liquid crystal color TFT
Resolution	1,024×768 dots
Input signal	Analog RGB video input, 1 channel
Power supply voltage	21.6 to 26.4 VDC
Current consumption	Approx. 0.7 A max.
Ambient temperature range	Operating: 0 to 50 °C, Storage: -25 to 65 °C (with no icing or condensation)
Ambient humidity range	Operating and storage: 35% to 85% (with no condensation)
Weight	Approx. 1.2 kg
Accessories	Instruction Sheet and 4 mounting brackets


Monitor Cable

Model	FZ-VM
Vibration resistiveness	10 to 150 Hz single amplitude 0.15 mm 3 directions, 8 strokes, 4 times
Ambient temperature range	Operation: 0 to +50 °C, Storage: -20 to +65 °C (with no icing or condensation)
Ambient humidity range	Operation and storage: 35% to 85%RH (with no condensation)
Ambient atmosphere	No corrosive gases
Material	Cable sheath: heat-resistant PVC Connector: PVC
Minimum bending radius	75 mm
Weight	approx. 170 g

Intelligent Compact Camera


Model	FZ-SQ010F	FZ-SQ050F	FZ-SQ100F	FZ-SQ100N
Field of vision	7.5×4.7 to 13×8.2 mm	13×8.2 to 53×33 mm	53×33 to 240×153 mm	29×18 to 300×191 mm
Installation distance	38 to 60 mm	56 to 215 mm	220 to 970 mm	32 to 380 mm
Image input	Image processing method	Real color		
	Image elements	1/3-inch color CMOS		
	Shutter	1/250 to 1/32258		
	Processing resolution	752 (H) × 480 (V)		
Lighting	Partial function	8 to 752 lines		
	Lighting method	Pulse		
	Lighting color	White		
Environmental immunity	LED class	Class 2		
	Ambient temperature range	Operating: 0 to 50 °C, Storage: -25 to 65 °C (with no icing or condensation)		
	Ambient humidity range	Operating and storage: 35% to 85% (with no condensation)		
	Ambient atmosphere	No corrosive gas		
Materials	Degree of protection	IEC 60529 IP40 (with Polarizing Filter Attachment mounted.)		
	Weight	Approx. 160 g		Approx. 150 g
Accessories	<ul style="list-style-type: none"> • Mounting Bracket (FQ-XL) (1) • Polarizing Filter Attachment (FQ-XF1) (1) • Instruction Manual • Member registration sheet 			

System configuration

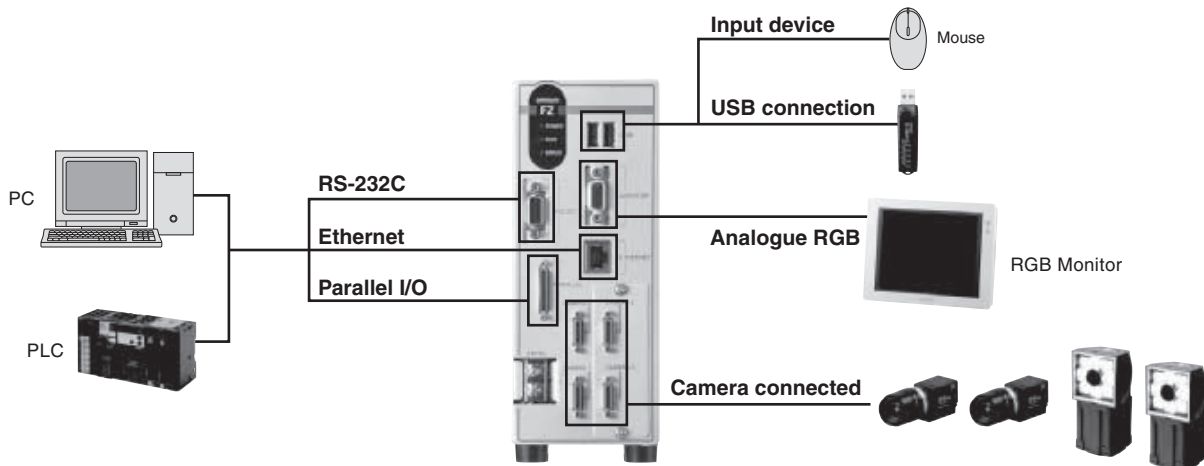

Controllers

- FZ3-L35□
- FZ3-L35□-10

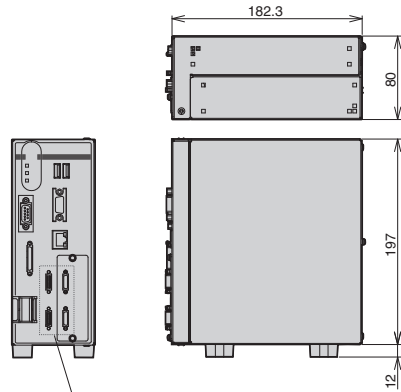


The 2-camera type has only two camera connectors on its left side.


Intelligent Compact Camera

Narrow View and Standard

- FZ-SQ010F
- FZ-SQ050F

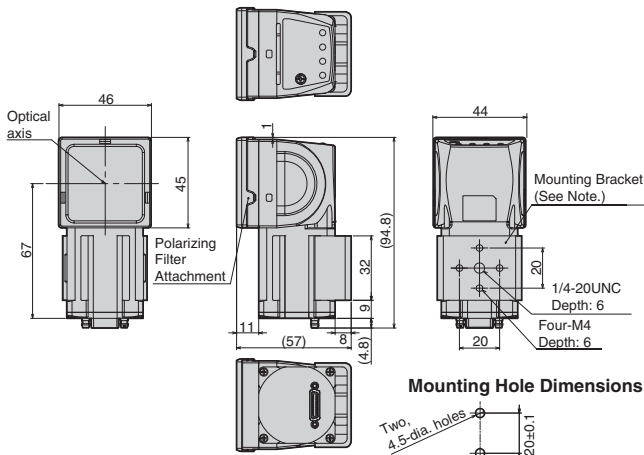


Mounting Hole Dimensions




Note. The Mounting Bracket can be mounted to either side. Tightening torque: 1.2 N-m

Wide View

- FZ-SQ100F (Long-distance)
- FZ-SQ100N (Short-distance)

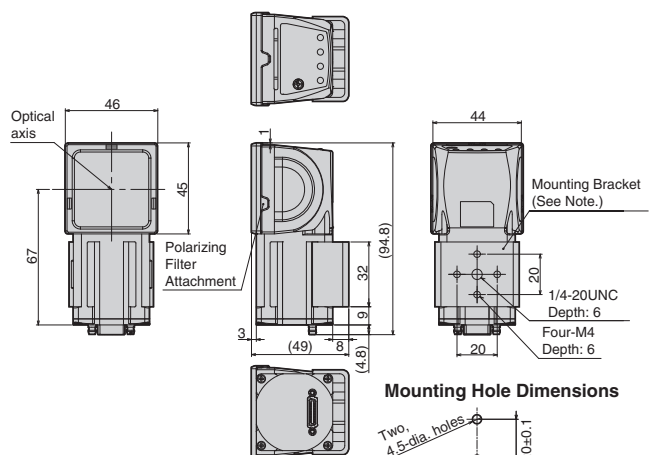


Mounting Hole Dimensions



Note. The Mounting Bracket can be mounted to either side. Tightening torque: 1.2 N-m

LCD Monitor

- FZ-M08

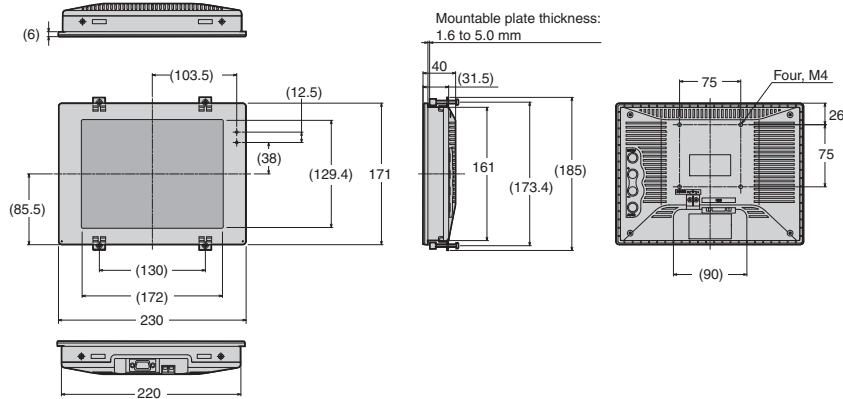

Mountable plate thickness: 1.6 to 5.0 mm

OMRON EUROPE B.V. Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. Tel: +31 (0) 23 568 13 00 Fax: +31 (0) 23 568 13 88 www.industrial.Omron.eu

Austria

Tel: +43 (0) 2236 377 800
www.industrial.Omron.at

Belgium

Tel: +32 (0) 2 466 24 80
www.industrial.Omron.be

Czech Republic

Tel: +420 234 602 602
www.industrial.Omron.cz

Denmark

Tel: +45 43 44 00 11
www.industrial.Omron.dk

Finland

Tel: +358 (0) 207 464 200
www.industrial.Omron.fi

France

Tel: +33 (0) 1 56 63 70 00
www.industrial.Omron.fr

Germany

Tel: +49 (0) 2173 680 00
www.industrial.Omron.de

Hungary

Tel: +36 1 399 30 50
www.industrial.Omron.hu

Italy

Tel: +39 02 326 81
www.industrial.Omron.it

Netherlands

Tel: +31 (0) 23 568 11 00
www.industrial.Omron.nl

Norway

Tel: +47 (0) 22 65 75 00
www.industrial.Omron.no

Poland

Tel: +48 (0) 22 645 78 60
www.industrial.Omron.pl

Portugal

Tel: +351 21 942 94 00
www.industrial.Omron.pt

Russia

Tel: +7 495 648 94 50
www.industrial.Omron.ru

South Africa

Tel: +27 (0)11 608 3041
www.industrial.Omron.co.za

Spain

Tel: +34 913 777 900
www.industrial.Omron.es

Sweden

Tel: +46 (0) 8 632 35 00
www.industrial.Omron.se

Switzerland

Tel: +41 (0) 41 748 13 13
www.industrial.Omron.ch

Turkey

Tel: +90 212 467 30 00
www.industrial.Omron.com.tr

United Kingdom

Tel: +44 (0) 870 752 08 61
www.industrial.Omron.co.uk

More Omron representatives
www.industrial.Omron.eu

Automation Systems

- Programmable logic controllers (PLC) • Human machine interfaces (HMI) • Remote I/O
- Industrial PC's • Software

Motion & Drives

- Motion controllers • Servo systems • Inverters

Control Components

- Temperature controllers • Power supplies • Timers • Counters • Programmable relays
- Digital panel indicators • Electromechanical relays • Monitoring products • Solid-state relays
- Limit switches • Pushbutton switches • Low voltage switch gear

Sensing & Safety

- Photoelectric sensors • Inductive sensors • Capacitive & pressure sensors
- Cable connectors • Displacement & width-measuring sensors • Vision systems
- Safety networks • Safety sensors • Safety units/relay units • Safety door/guard lock switches