


smooth

Visual

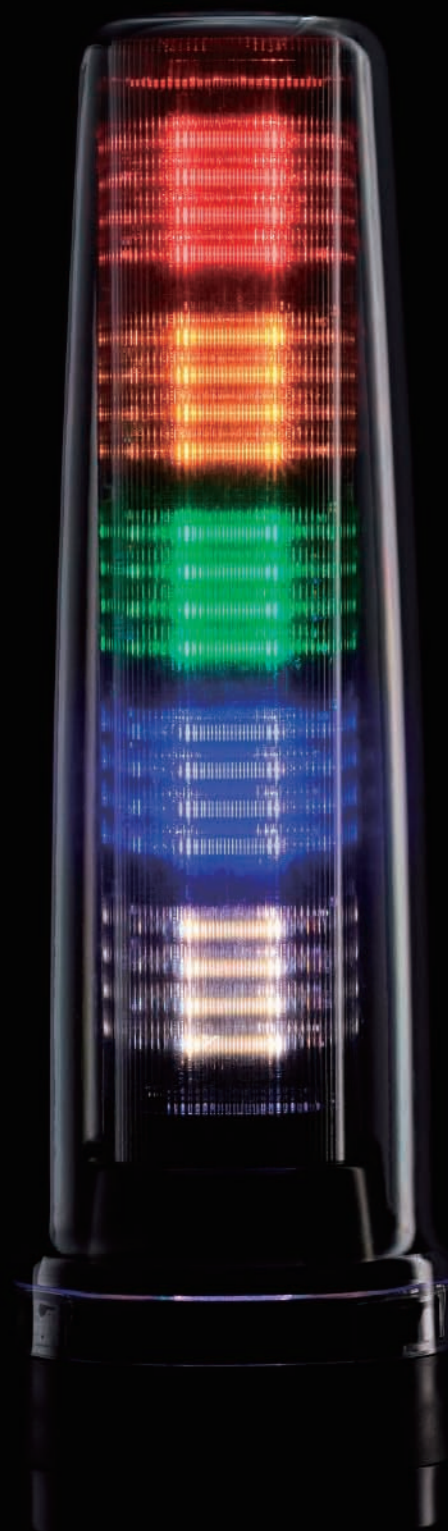

Introducing a smart and smooth body to enhance harmony with machinery.

It's smart & smooth

Shapely Body



The smooth streamline surface prevents dust from accumulating. The outer cover construction also reduces the risk of environmental stress cracks due to oil mist, etc.

Crispy-Clear



A special coating on the inner lens enhances the contrast of lighting and fading so that the signal color could be easily distinguished and increase visibility.


Quick Disconnect



The optional M12 quick-disconnect and stackable design makes installation work simpler, saving labor and time. (We type model is standard)



Available Soon
LED Signal Tower **LS7**

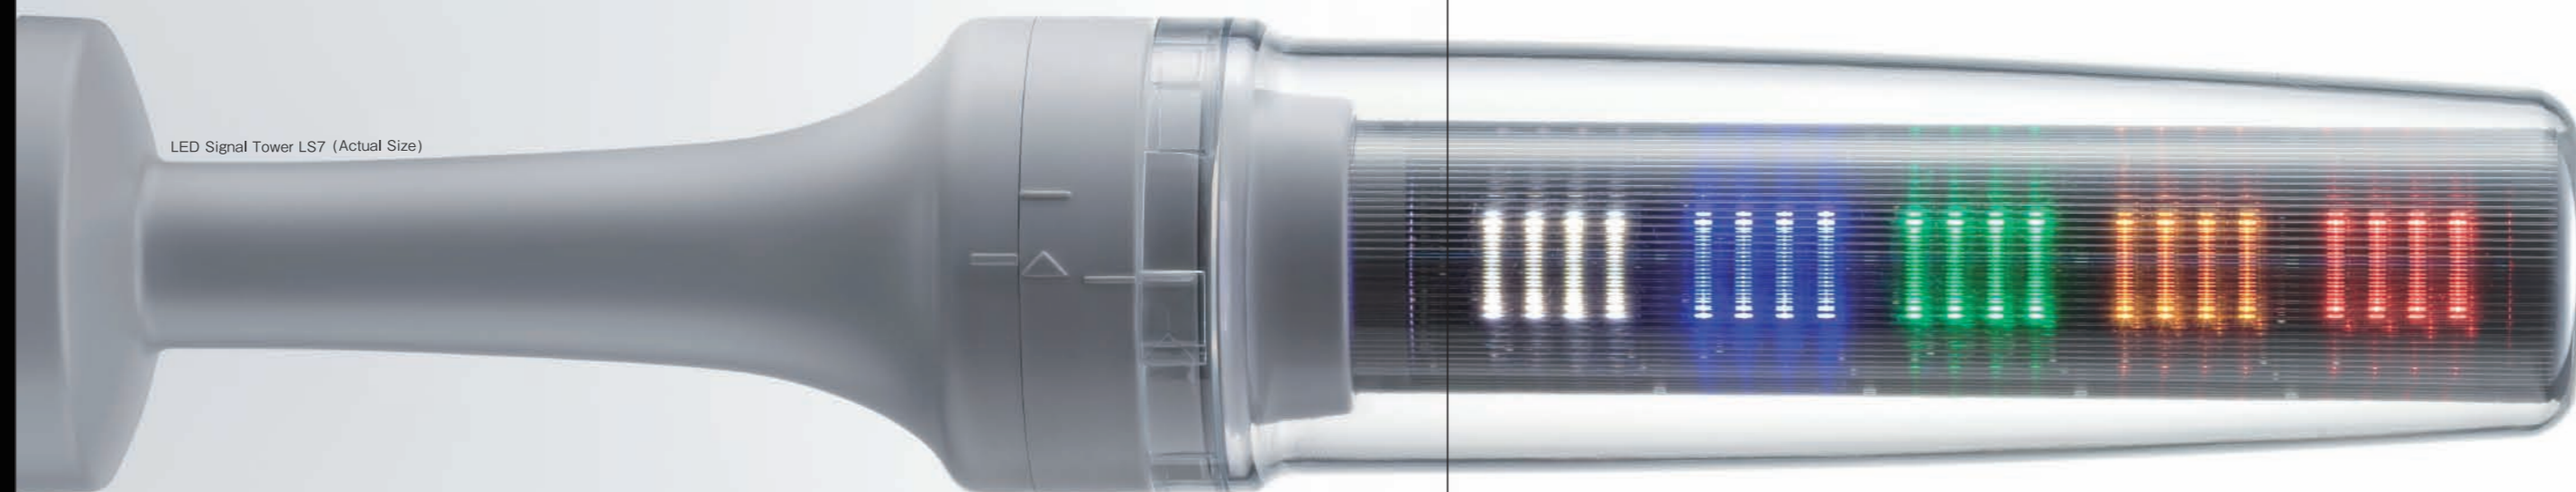

LED Signal Tower LS7 (Actual Size)

PATLITE®

DIGEST CATALOG 2011
NEW PRODUCT

PATLITE Corporation

International Division
8-8, Matsuyamachi, Chuo-ku, Osaka, Japan 542-0067 TEL.+81-6-6763-8220 FAX.+81-6-6763-8221

PATLITE (U.S.A.) Corporation
20130 S. Western Ave., Torrance, CA 90501, U.S.A TEL.+1-310-328-3222 FAX.+1-310-328-2676

PATLITE Europe GmbH
Am Soeldnermoos 8, D-85399 Hallbergmoos, Germany TEL.+49-811 9981 9770-0 FAX.+49-811 9981 9770-9

PATLITE (SINGAPORE) PTE LTD
No.2 Leng Kee Road, #05-01 Thye Hong Centre, Singapore 159086 TEL.+65-6226-1111 FAX.+65-6324-1411

PATLITE (CHINA) Corporation
Room 512, Jialing Business Building, No.897-3 Lingxi Road, Shanghai China 200072 TEL.+86-21-6630-8969 FAX.+86-21-6630-8938

<http://www.patlite.com> E-mail: overseas@patlite.co.jp

1223A 1012 B(B)/B(S)/M/A



CAUTION

To ensure correct use of these products, read the "Instruction Manual" prior to use. Failure to follow all safeguards can result in fire, electric shock, or other accidents. Specifications are subject to change without notice.



For the benefit of mankind and the earth, Patlite is committed to developing environmentally friendly products.

smart

Harmony



Slim Waterproof Type LED Light Bar

CLA

IP69K

Ultra-bright Uniform LED Illumination
Seven Different Sizes
Waterproof

IP66 IP67 IP69K DAYLIGHT COLOR 6800K DIMMABLE COLOR 4800K Amber LED RoHS CE c UL US

CLA15S-CD or CLA15S-CN L:1500mm

CLA12S-CD or CLA12S-CN L:1200mm

CLA9S-CD or CLA9S-CN L: 900mm

CLA6S-CD or CLA6S-CN L: 600mm

CLA3S-CD or CLA3S-CN L: 300mm

CLA2S-CD or CLA2S-CN L: 200mm

CLA1S-CD or CLA1S-CN L: 100mm

CLA1S-Y L: 100mm

CLA3S-Y L: 300mm

PATLED's

Amber (-Y)

Daylight (-CD) or Natural White (-CN)

MP3 Annunciator Model

BSV · BM · BD · BK · EW

A slim design of only 19.9 mm is the thinnest in the industry!!

Equipment or panel mount is possible with the miniaturization.
Time and labor reduction was achieved with the easy front attachment and removal!
With a slimmer backside, mounting in a narrow space is now possible.

©For the MP3 annunciator boards (Patlite's investigation as of October, 2010)



BSV (Actual Size)



The new front panel includes easy mounting and volume adjustment!

Available Soon
Slim-style MP3 Annunciator Model **BSV**
MP3 85dB (at 1m) 63 Second Playback PNP Open Collector NPN Open Collector
IP54 RoHS CE
■ Rated Voltage DC12/24V (no polarity)
■ Power Consumption 4W
■ Sound Pressure 85 dB, volume adjustable with a sound reduction function
■ Playback Channels 15(binary input) / 4 (bit input)
■ Size (Main Unit) W75xH75xD19.9mm
■ Preliminary Specifications as of Oct. 2010.

About 4/5 in. thick
Auxiliary Speaker Model Available!
SPB-2E
Slim-type Speaker (2W8Ω)



BM φ30
NPN Open Collector 90dB (at 1m) BUZZER
2 CHANNELS IP34 CE



-J (Light Gray)
-R (Red)
-Y (Yellow)

EWB
NPN Open Collector 105dB (at 1m) ALARM
8 CHANNELS IP53 CE




-K (Dark Gray)
-J (Light Gray)

BK
NPN Open Collector 95dB (at 1m) 32 SOUNDS
IP54 RoHS CE


LED Signal Tower

ME-A · MP · LCE-A · LU5 · LME · LU7 · WE · LKEH

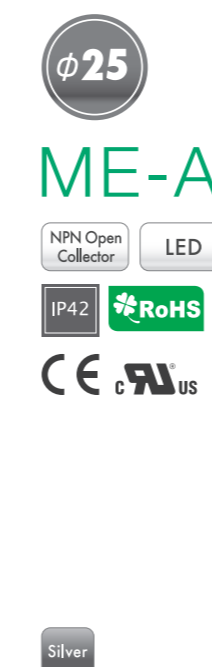


ME-A
NPN Open Collector LED
IP42 RoHS CE c UL US

Silver

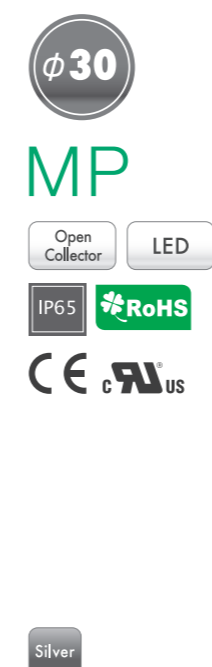


MP
Open Collector LED
IP65 RoHS CE c UL US

Silver

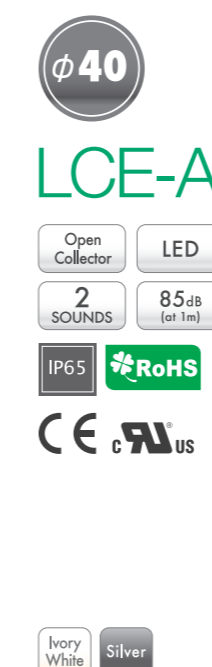


LCE-A
Open Collector LED
2 SOUNDS 8.5dB (at 1m)
IP65 RoHS CE c UL US

Ivory White Silver

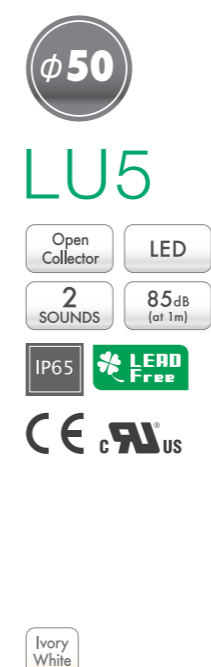


LU5
Open Collector LED
2 SOUNDS 8.5dB (at 1m)
IP65 L E E F R O H S CE c UL US

Ivory White

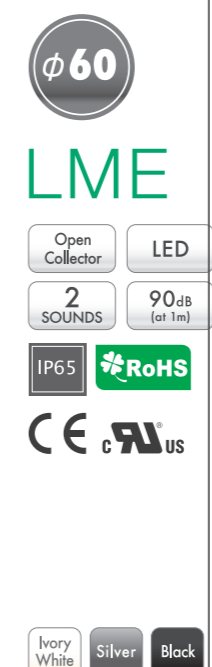


LME
Open Collector LED
2 SOUNDS 90dB (at 1m)
IP65 RoHS CE c UL US

Ivory White Silver Black

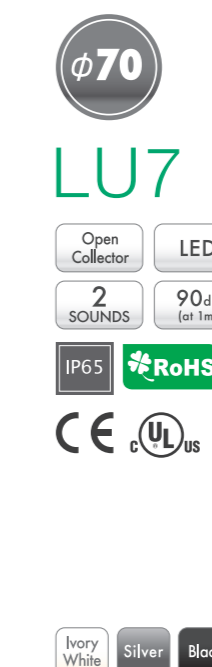


LU7
Open Collector LED
2 SOUNDS 90dB (at 1m)
IP65 RoHS CE c UL US

Ivory White Silver Black

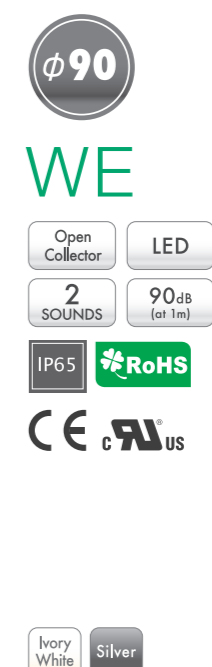

WE
Open Collector LED
2 SOUNDS 90dB (at 1m)
IP65 RoHS CE c UL US

Ivory White Silver

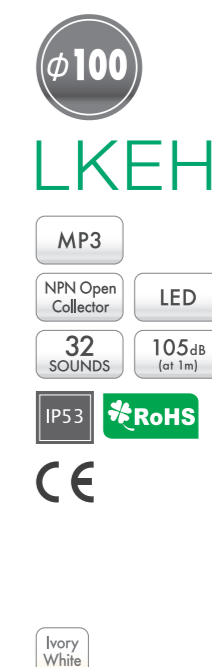

LKEH
MP3
NPN Open Collector LED
32 SOUNDS 105dB (at 1m)
IP53 RoHS CE

Ivory White



LED Light Bar

CLF · CLT · CLM



CLT
PATLED's
IP66G IP67G DAYLIGHT COLOR 6750K Water/Oil Resistant
RoHS CE



CLF
PATLED's
IP67 DAYLIGHT COLOR 6750K Amber LED
RoHS CE c UL US



CLM
PATLED's
IP67F DAYLIGHT COLOR 6750K
RoHS CE c UL US

Network Signal Tower

NHE-3FB · PHU-3



Signal Tower
For Network & Security Solutions
NHE-3FB
Ethernet LAN 2 SOUNDS
RSH SNMPV1-2



Signal Tower
For Network & Security Solutions
PHU-3
USB



Interface Converter
PHC-100A
SERIAL RS232C RELAY OUTPUT 8