




allCLEAR
new

B A R G

> **STEADY** <
> **FLASHING** <
> **ROTATING** <

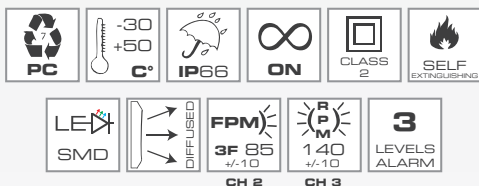

CAN BE INSTALLED WITH

G B R W

See Base Section on page 30

	SHALLOW		DEEP		WALL	
12/24V ACDC	✓	✓	✓	✓	✓	✓
PNP 12/24V DC	X	X	✓	✓	✓	✓
40/80V ACDC	X	✓	✓	✓	✓	✓
120/240V AC	X	✓	✓	✓	✓	✓
JR 120/240V AC	X	X	✓	X	✓	✓
	FLUSH		DOUBLE		POLE	

FLR S | PART NO

	B	A	R	G
allCOLOR	90351	90352	90353	90354
allCLEAR	90121	90122	90123	90124

FLR S

Multifunctional LED beacon with high optical performance. Developed with a multichannel technology, FLR S allows three separate light effects (steady, rotating, flashing) controllable via independent electric contacts.

Available with allCOLOR and allCLEAR lens, FLR S is the right choice for a high-end LED beacon.

TECHNICAL SPECIFICATIONS

MULTIFUNCTION

3 separate functions (steady, rotating and flashing) controllable via independent electric contacts

HIGH OPTICAL PERFORMANCE

CHANNEL 1 | STEADY LIGHT

A deep and rich light source ideal for attracting attention yet without disturbing

CHANNEL 2 | FLASHING LIGHT

A triple-flash strobe effect ideal for all applications where an immediate attention gain is mandatory

CHANNEL 3 | ROTATING LIGHT

A unique rotating effect perfectly simulating the traditional rotating beacons yet without moving parts hence enormously enhancing product life time

VOLTAGES

According to the installed base

PROTECTION GRADE

IP66, UL TYPE 4X, suitable for outdoor applications

OPERATING TEMPERATURE

-30/+50 °C

LED TECHNOLOGY

Virtually zero maintenance thanks to the built-in LED technology that guarantees up to 100.000* hours of product life

* At normal conditions, without vibrations and heavy temperature changes

MECHANICAL FEATURES

Self extinguishing PC body with high impact resistance, suitable for outdoor applications thanks to the IP66/TYPER 4X protection grade

OPTICAL FEATURES

24x Bright LEDs in a 6x4 configuration. Available with 2 different lens types, according to the final application

allCOLOR STANDARD USE

Colored lens with colored light source allows optimization of the emission frequency producing a rich intense light output

allCLEAR USE IN VERY BRIGHT ENVIRONMENTS

Clear lens with colored light source. In very bright environments it is possible that the ambient brightness lights up the device when it is switched OFF creating problems in distinguishing between the ON and OFF state of the device (phantom effect). The clear lens allows clear distinction between the ON and OFF status of the device

CERTIFICATIONS



DRAWINGS, DIMENSIONS AND WEIGHTS

