

LUXOR LED




LUXOR 3

LUXOR 4



DRAWINGS, DIMENSIONS AND WEIGHTS

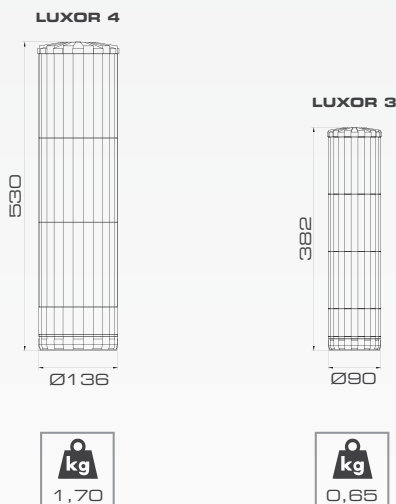

LUXOR LED | PART NO

LUXOR 3	24V ACDC	16693
LUXOR 4	24V ACDC	16664

More configurations upon request:
automax@sirena.it

LUXOR LED

Large size 3 stage stacklight (green, amber, red) available in 2 diameters: LUXOR 4 (136 mm) e LUXOR 3 (90 mm).

An integrated LED luminous source allows maximizing color emission frequency guaranteeing an outstanding color output.

Thanks to its larger size, LUXOR is particularly indicated for larger scale automated installation.

Configured with a flat mounting base, can also be available with a lateral base for side/wall installations.

NOTE

LUXOR is also available with traditional incandescent filament bulbs (steady and flashing), with built-in rotating beacon, with Xenon discharge lamps, with a sounder module and in a range of voltages from 12 to 240V.

Furthermore, LUXOR can be configured with a wide selection of accessories to facilitate all mounting scenarios. Please contact us for further information: automax@sirena.it

KEY CHARACTERISTICS

LIGHT EFFECTS
STEADY

VOLTAGES
24V ACDC +/-10%

PROTECTION GRADE
IP54

OPERATING TEMPERATURE
-30/+50 C°

MECHANICAL FEATURES

Self extinguishing PC domes with high impact resistance. Body in fiber glass reinforced nylon (PA66 FV30)

OPTICAL FEATURES

The vertically lined lens allows a perfect light distribution over 360°

allCOLOR

STANDARD USE

Colored lens with colored light source. The use of a colored lens with the same color of light source allows optimization of the emission frequency producing a rich intense light output

CERTIFICATIONS

